

CASOLUX®

The lights of tomorrow



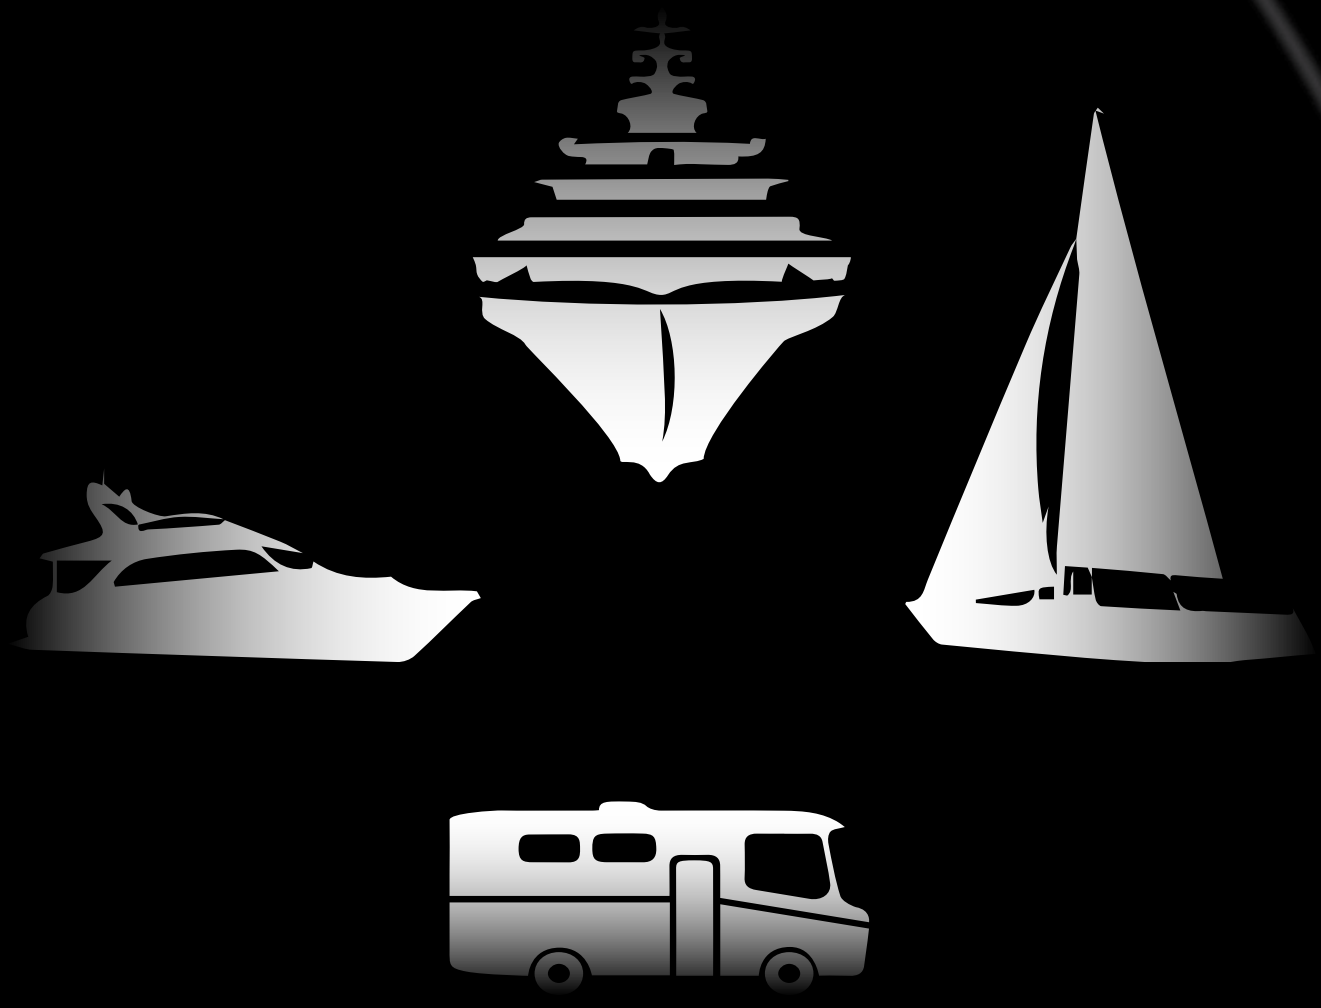

Edition - 25

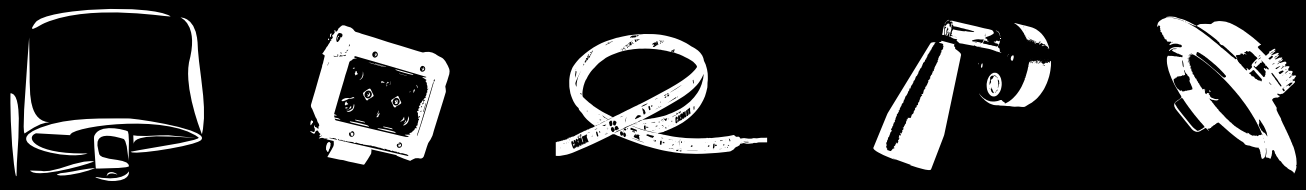



Introduction

Over the years Casolux has shown the way to innovative design within marine lighting by focusing on individuality, reliability and quality- three words that demonstrate the assurance that we have given our customers since the company was founded in 2012.

Thanks to our excellent staff, we have continued to keep this commitment, earning a more and more prominent position year on year, in a global market for marine lights for yacht and naval vessel.

This success would not have been possible without our employees` experience, technical skills and passion for design. developing lights that are perfectly tailored to meet each customer/ yard´s individual wishes and specific requirements.

The key factor that sets us apart, is by listening to our customers we are able to offer high flexibility, choice and innovation, from concept to finished product.
All processes are incorporated at our premises which include a component warehouse, product assembly, stock inventory, testing and show room.

Casolux have built their company by understanding the design and demands of marine lights, and through the pursuance of excellence, aim to become leaders within the industry.







info@casolux.com
Tlf. +45 7445 0005
Denmark - 6400 Sønderborg

CASOLUX®

The lights of tomorrow

Page


4-17 — Small Craft Lights


18-23 — Customized Reading Lights


24-26 — Reading and Wall Lights


27-35 — Mega Yacht Lights


36-39 — Moterhome Lights


40-45 — Led Strips


46-47 — Flood, Machine-room and Underwater Lights


48-50 — Misc. lighs, Bulbs, Electronic Accessories etc.

- Suitible for Small Crafts
- Suitible for Mega Yacht
- Suitible for for Motorhomes
- Red color light
- Blue color light
- Red / WW switchable light
- IP grade
- Lumen output per watt
- Color temperature in Kelvin
- Beam angle
- Dimmable
- USB charger
- Led driver
- Color rendering index
- LED´s lifetime
- For indoor use
- For indoor and outdoor
- For underwater use


Disclaimer:
Casolux assumes no responsibility or liability for any errors, omissions or changes towards this catalog.



Small Craft Lights

Maria - A1





mm	SMALL	LARGE
A	69,5	86
B	40,5	55
C	4,5	4,5
D	52	70
E	19	19




Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)

IP 65 | 120° angle | Lm/w 58-68 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A1	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu
MARIA-A1	SMALL	SS / BL / GR / WH	2,5w	10-32 V AC/DC	SS/Alu
MARIA-A1	LARGE	SS / BL / GR / WH	3w	10-32 V AC/DC	SS/Alu

Maria - A3





mm	SMALL	LARGE
A	69,5	86
B	40,5	55
C	7	7
D	52	70
E	16	16




Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)

IP 65 | 120° angle | Lm/w 58-68 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A3	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu
MARIA-A3	SMALL	SS / BL / GR / WH	2,5w	10-32 V AC/DC	SS/Alu
MARIA-A3	LARGE	SS / BL / GR / WH	3w	10-32 V AC/DC	SS/Alu

Maria - A4 - 2700K - Ra90





	SMALL	
mm	STANDARD	Ø90
A	69,5	90
B	40,5	40,5
C	2	2
D	52	52
E	19	19




Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)

IP 65 | 120° angle | Lm/w 85 | H 50 000 | CCT K 2700 | CRI >90 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A4	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu

Maria - A4 - Standard





	SMALL	News	MEDIUM	News	LARGE
mm	STANDARD	Ø90	STANDARD	Ø90	
A	69,5	90	82	90	86
B	40,5	40,5	50	50	55
C	2	2	3	3	3
D	52	52	62	62	70
E	19	19	19	19	19



Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)

News New Ø90 Front for Small and Medium Maria


IP 65 | angle 120° | Lm/w 58-68 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A4	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu
MARIA-A4	SMALL	SS / BL / GR / WH	2,5w	10-32 V AC/DC	SS/Alu
MARIA-A4	MEDIUM	BL / GR / WH	2,5w	10-32 V AC/DC	Alu
MARIA-A4	LARGE	SS / BL / GR / WH	3w	10-32 V AC/DC	SS/Alu

Maria - A4 - Standard with DUO colour

News





	SMALL	News	LARGE
mm	STANDARD	Ø90	
A	69,5	90	86
B	40,5	40,5	55
C	2	2	3
D	52	52	70
E	19	19	19



Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)


News New Ø90 Front for Small Maria


IP 65 | angle 120° | Lm/w 58-68 | H 50 000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A4-DUO	SMALL	SS / BL / GR / WH	2w/0,5w	10-32 V AC/DC	SS/Alu
MARIA-A4-DUO	LARGE	SS / BL / GR / WH	3w/0,5w	10-32 V AC/DC	SS/Alu

Maria - A4 - Touch

News

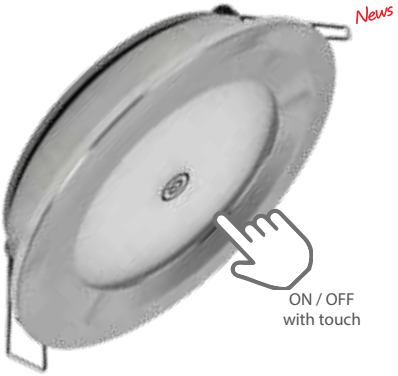



	SMALL	News	LARGE
mm	STANDARD	Ø90	
A	69,5	90	86
B	40,5	40,5	55
C	2	2	3
D	52	52	70
E	19	19	19



Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)


News New Ø90 Front for Small Maria


IP 65 | angle 120° | Lm/w 58-68 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A4-CTO	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu
MARIA-A4-CTO	LARGE	SS / BL / GR / WH	3w	10-32 V AC/DC	SS/Alu

Maria - A4 - Touch with Dim Memory

News

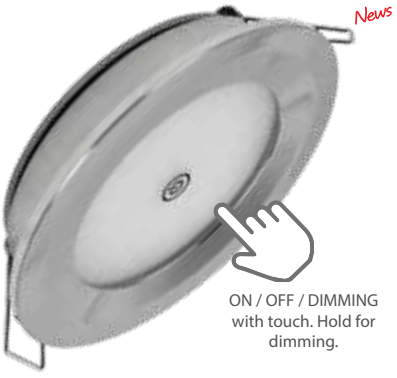



	SMALL	News
mm	STANDARD	Ø90
A	69,5	90
B	40,5	40,5
C	2	2
D	52	52
E	19	19



Stainless Steel (SS) Optional with brushed surface | Black (BL) | Grey (GR) | White (WH)


News New Ø90 Front

IP 65 | angle 120° | Lm/w 58-68 | H 50 000 | CCT K 3000 | CRI >85 | Dim Touch Dim w/memory | Indoor/Outdoor

Product	Size	Frame	Power	Input Volt	Material
MARIA-A4-CTDI	SMALL	SS / BL / GR / WH	2w	10-32 V AC/DC	SS/Alu
MARIA-A4-CTDI	SMALL	SS / BL / GR / WH	2,5w	10-32 V AC/DC	SS/Alu

A1 Controller IP20







Stainless steel (SS)

One Controller can control up to 15 receivers.


IP 20 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor

Product	Frame	Power	Input Volt	Material
A1-MA	SS	3w	9-32 V DC	SS/Alu
A1-MA-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

A1 Controller IP64







Stainless steel (SS)

One Controller can control up to 15 receivers.


IP 64 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
A1-MA-IP64	SS	3w	9-32 V DC	SS/Alu
A1-MA-IP64-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

A1 Receiver








Stainless steel (SS)

IP 65 | angle 120° | Lm/w 95 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Master | Indoor/ Outdoor


Product	Frame	Power	Input Volt	Material
A1-SL	SS	3w	9-32 V DC	SS/Alu
A1-SL-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

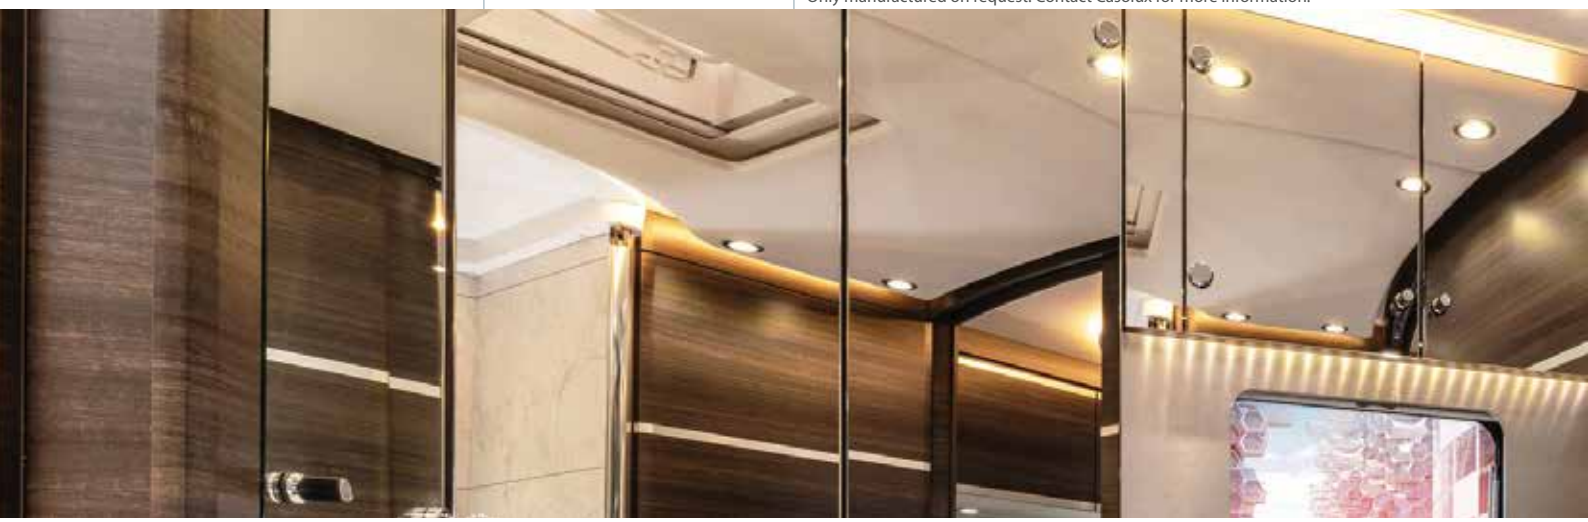

A5 Controller IP20







Stainless steel (SS)

One Controller can control up to 15 receivers.


IP 20 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor

Product	Frame	Power	Input Volt	Material
A5-MA	SS	3w	9-32 V DC	SS/Alu
A5-MA-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

A5 Controller IP64







Stainless steel (SS)

One Controller can control up to 15 receivers.


IP 64 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
A5-MA-IP64	SS	3w	9-32 V DC	SS/Alu
A5-MA-IP64-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

A5 Receiver







Stainless steel (SS)

IP 65 | angle 120° | Lm/w 95 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Master | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
A5-SL	SS	3w	9-32 V DC	SS/Alu
A5-SL-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.






Copyright N. krauss/Hamburg

Malou Controller IP20







Stainless steel (SS) | Stainless steel Painted White (SS-WH) | Stainless steel Painted Black (SS-BL)


One Controller can control up to 15 receivers.

IP 20 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor

Product	Frame	Power	Input Volt	Material
MALOU-MA	SS / SS-WH / SS-BL	3w	9-32 V DC	SS/Alu
MALOU-MA-DUO	SS / SS-WH / SS-BL	3w /3w	9-32 V DC	SS/Alu

Malou Controller IP64







Stainless steel (SS) | Stainless steel Painted White (SS-WH) | Stainless steel Painted Black (SS-BL)


One Controller can control up to 15 receivers.

IP 64 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
MALOU-MA-IP64	SS / SS-WH / SS-BL	3w	9-32 V DC	SS/Alu
MALOU-MA-IP64-DUO	SS / SS-WH / SS-BL	3w/3w	9-32 V DC	SS/Alu

Malou Receiver







Stainless steel (SS) | Stainless steel Painted White (SS-WH) | Stainless steel Painted Black (SS-BL)

IP 65 | angle 120° | Lm/w 95 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Master | Indoor/ Outdoor


Product	Frame	Power	Input Volt	Material
MALOU-SL	SS / SS-WH / SS-BL	3w	9-32 V DC	SS/Alu
MALOU-SL-DUO	SS / SS-WH / SS-BL	3w/3w	9-32 V DC	SS/Alu



Malou Controller IP20 - Surface mounted



WW/RED: Double click to change colour.






Stainless steel (SS)

One Controller can control up to 15 receivers.


IP 20 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor

Product	Frame	Power	Input Volt	Material
MALOU-MA-SURFACE	SS	3w	9-32 V DC	SS/Alu
MALOU-MA-SURFACE-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Malou Controller IP64 - Surface mounted

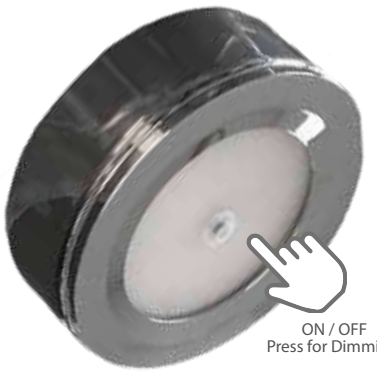

WW/RED: Double click to change colour.






Stainless steel (SS)


One Controller can control up to 15 receivers.

IP 64 | angle 120° | Lm/w 45-50 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Push Dim | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
MALOU-MA-IP64-SUR	SS	3w	9-32 V DC	SS/Alu
MALOU-MA-IP64-SUR-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Malou Receiver - Surface mounted

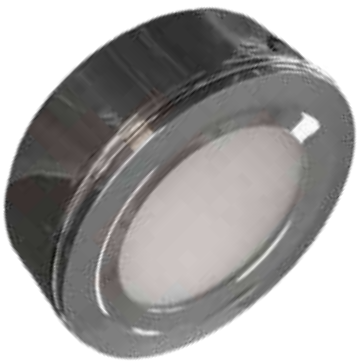






Stainless steel (SS)

IP 65 | angle 120° | Lm/w 95 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim Master | Indoor/ Outdoor

Product	Frame	Power	Input Volt	Material
MALOU-SL-SUR	SS	3w	9-32 V DC	SS/Alu
MALOU-SL-SUR-DUO	SS	3w/3w	9-32 V DC	SS/Alu

Maja - Surface mounted



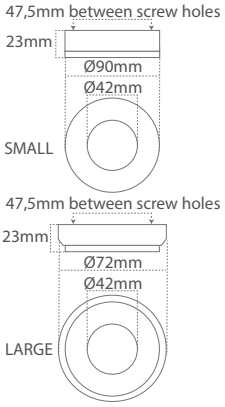


MAJA-SURFACE-SMALL
Stainless steel (SS)


MAJA-SURFACE-LARGE
Stainless steel (SS)


IP 65 | angle 90° | Lm/w 56 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input	Material
MAJA-SURFACE-SMALL	SS	3,6w	10-32 V DC	SS/Alu
MAJA-SURFACE-SMALL DUO	SS	3,6w/1,8w	10-32 V DC	SS/Alu
MAJA-SURFACE-LARGE	SS	3,6w	10-32 V DC	SS/Alu
MAJA-SURFACE-LARGE DUO	SS	3,6w/1,8w	10-32 V DC	SS/Alu

Large version is only manufactured on request. Contact Casolux for more information.

Maggi - Surface mounted






Stainless steel (SS)


IP 65 | angle 80° | Lm/w 55 | H 40 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input	Material
MAGGI-SURFACE	SS	3w	10-18 V DC Optional 10-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Medina - Surface mounted






Aluminium Grey (GR)


IP 65 | angle 120° | Lm/w 65 | H 50 000 | CCT K 3000 | CRI >85 | Indoor/Outdoor

Product	Frame	Power	Input	Material
MEDINA-SURFACE	GR	1w	10-32 V DC	Alu



Maja Round






Stainless steel (SS)



Stainless steel
Painted White (SS-WH)

IP 65 | angle 90° | Lm/w 56 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input Volt	Material
MAJA-ROUND	SS / SS-WH	3,6w	10-32 V DC	SS/Alu
MARIA-ROUND-DUO	SS / SS-WH	3,6w/1,8w	10-32 V DC	SS/Alu

Maja Square






Stainless steel (SS)



Stainless steel
Painted White (SS-WH)


IP 65 | angle 85° | Lm/w 56 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input Volt	Material
MAJA-SQUARE	SS / SS-WH	3,6w	10-32 V DC	SS/Alu
MARIA-SQUARE-DUO	SS / SS-WH	3,6W/1,8w	10-32 V DC	SS/Alu

Maggi Small


White (WH)




Grey (GR)
RAL 7038



Stainless steel (SS)
Can be made at request

IP 44/66 | angle 40° | Lm/w 105 | H 40 000 | CCT K 2700 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	IP	Frame	Power	Input Volt	Material
MAGGI	44	WH	3,5w	10-32 V DC	Alu
MAGGI	66	GR	3,5w	10-32 V DC	Alu
MAGGI	44	SS	3w	10-32 V DC	SS/Alu

Maggi Ø69








IP 65 | angle 80° | Lm/w 55 | H 40 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input Volt	Material
MAGGI-LARGE	SS	3w	10-18 V DC	SS/Alu

Only manufacctured on request. Contact Casolux for more information.

Mie








IP 54 | angle 25° | Lm/w 343 | H 40 000 | CCT K 2700 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input Volt	Material
MIE	WH	3w	10-30 V DC	Alu

Magda








Stainless Steel (SS)

IP 65 | angle 90° | Lm/w 75 | H 40 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/ Outdoor


Product	Frame	Power	Input Volt	Material
MAGDA	SS	4,4w	10-30 V DC	SS/Alu

Malou 82





Square frame front.





Stainless steel (SS)



Stainless steel
Painted White (SS-WH)



Stainless steel
Painted Black (SS-BL)

Optional with square frame.



SQUARE RECT FRAME



SQUARE OVAL FRAME


IP 65 | angle 120° | Lm/w 95 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/ Outdoor


Product	Frame	Power	Input	Material
MALOU-82	SS / SS-WH / SS-BL	4,5w	10-32 V DC	SS/Alu
MALOU-82-DUO	SS / SS-WH / SS-BL	3,6w/0,6w	10-32 V DC	SS/Alu



Copyright N. krauss/Hamburg

Mathilde Small



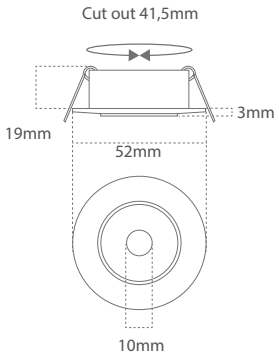





Aluminium (Alu)


IP 20 | angle 25° | Lm/w 58 | H 40 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input Volt	Material
MATHILDE-SMALL	Alu	1,2w	350mA / 10-30 V DC	Alu

Only manufactured on request. Contact Casolux for more information.

Mathilde Sphere



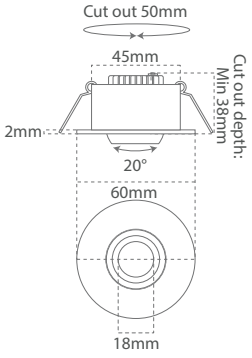







Stainless Steel (SS)


IP 20 | angle 22° | Lm/w 81 | H 35 000 | CCT K 3000 | CRI >80 | Indoor

Product	Frame	Power	Input Volt	Material
MATHILDE-SPHERE	SS	1,5w	10-32 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Mathilde








Stainless Steel (SS)

IP 65 | angle 90° | Lm/w 58 | H 40 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input Volt	Material
MATHILDE	SS	2,4w	10-32 V DC	SS/Alu

Mathilde Large







Stainless Steel(SS)
Round (RO)



Stainless Steel (SS)
Square (SQ)


IP 44 | angle 100° | Lm/w 58 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input Volt	Material
MATHILDE-LARGE-RO	SS	2,4w	10-30 V DC	SS/Alu
MATHILDE-LARGE-SQ	SS	2,4w	10-30 V DC	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Marina Push Up Table light








Stainless Steel (SS)

IP 67 | angle 360° | Lm/w 100 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
MARINA	4w	10-32 V DC	SS

Merle front








Stainless Steel (SS)
Optional with brushed surface

IP 67 | angle 40° | Lm/w 80 | H 30 000 | CCT K 3000 | CCT Red | CCT Blue | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
MERLE-FRONT-3000K	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS
MERLE-FRONT-RED	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS
MERLE-FRONT-BLUE	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS

Merle down









Stainless Steel (SS)
Optional with brushed surface

IP 67 | angle 120° | Lm/w 80 | H 30 000 | CCT K 3000 | CCT Red | CCT Blue | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
MERLE-DOWN-3000K	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS
MERLE-DOWN-RED	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS
MERLE-DOWN-BLUE	0,5w	10-18 V DC / 18-30 V DC / 10-30 V DC	SS
MERLE-DOWN-DUO *News*	0,5w / 0,5w	10-18 V DC / 18-30 V DC	SS

Cleo Special



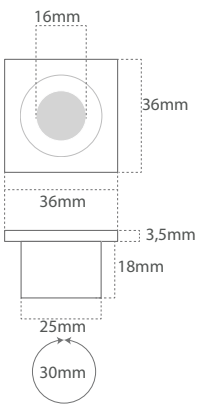



CLWO-SPECIAL-SQUARE
Stainless Steel (SS)



CLEO-SPECIAL-ROUND
Stainless Steel (SS)


IP 65 | angle 21 | Lm/w 22 | H 35 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
CLEO-SPECIAL-ROUND	3w	10-32 V DC	Alu/SS
CLEO-SPECIAL-SQUARE	3w	10-32 V DC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Cleo Round



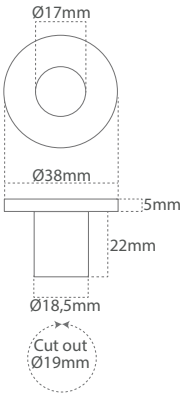


Stainless Steel (SS)


Stainless Steel painted White (SS-WH)



Stainless Steel painted Black (SS-BL)



Product	Frame	Power	Input Volt	Material
CLEO-ROUND	SS / SS-WH / SS-BL	0,6w	10-32 V DC	SS/Plastic

Cleo Round 25°



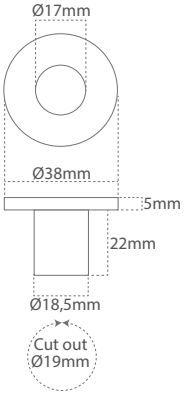


Stainless Steel (SS)



Stainless Steel painted White (SS-WH)



Stainless Steel painted Black (SS-BL)



Product	Frame	Power	Input Volt	Material
CLEO-ROUND-25	SS / SS-WH / SS-BL	0,6w	10-32 V DC	SS/Plastic

Cleo Square

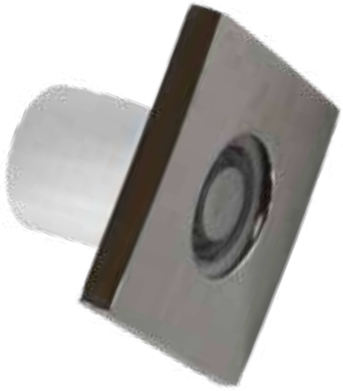

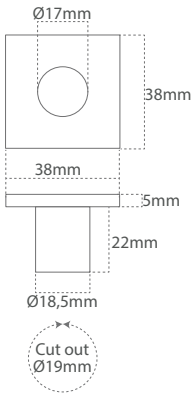


Stainless Steel (SS)



Stainless Steel painted White (SS-WH)



Stainless Steel painted Black (SS-BL)



Product	Frame	Power	Input Volt	Material
CLEO-SQUARE	SS / SS-WH / SS-BL	0,6w	10-32 V DC	SS/Plastic

Cleo Square 34°

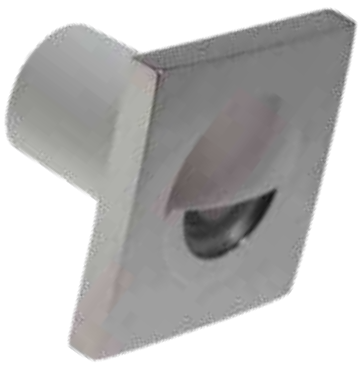

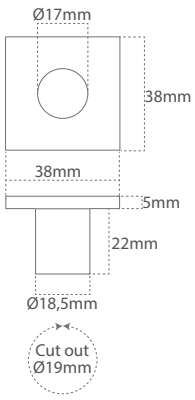


Stainless Steel (SS)


Stainless Steel painted White (SS-WH)



Stainless Steel painted Black (SS-BL)



Product	Frame	Power	Input Volt	Material
CLEO-SQUARE-34	SS / SS-WH / SS-BL	0,6w	10-32 V DC	SS/Plastic

Mille








Stainless Steel (SS)

IP 67 | angle 15° | Lm/w 30 | H 40 000 | CCT K 3000 | CCT Red | CCT Blue | CRI >90 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
MILLE-3000K	0,2w	10-30 V DC	SS
MILLE-RED	0,2w	10-30 V DC	SS
MILLE-BLUE	0,2w	10-30 V DC	SS

Milla







MILLA-ROUND
Stainless Steel (SS)



MILLA-SQUARE
Stainless Steel (SS)




IP 65 | CCT K 3000 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input	Material
MILLA-ROUND	SS	1,2w	10-32 V DC	Alu/SS
MILLA-SQUARE	SS	1,2w	10-32 V DC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Milo Half



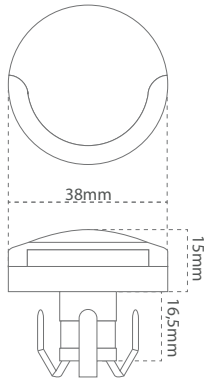



Stainless Steel (SS)




IP 67 | CCT K 3000 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input	Material
MILO-HALF	SS	1,5w	10-32 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Milo



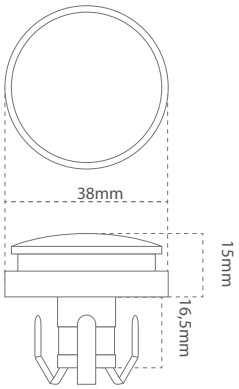



Stainless Steel (SS)




IP 67 | CCT K 3000 | Dim PWM | Indoor/Outdoor

Product	Frame	Power	Input	Material
MILO	SS	1,5w	10-32 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Mateo







MATEO-ROUND
Stainless Steel (SS)



MATEO-SQUARE
Stainless Steel (SS)


IP 44 | CCT K 3000 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MATEO-ROUND	SS	1,2w	10-32 V DC	Alu/SS
MATEO-SQUARE	SS	1,2w	10-32 V DC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Mai



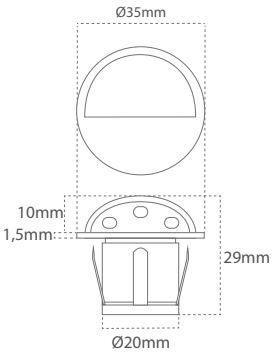




Stainless Steel (SS)

IP 65 | angle 110° | Lm/w 110 | H 40 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor

Product	Power	Input	Material
MAI-SMALL	0,3w	10-32V DC	SS

Max Standard



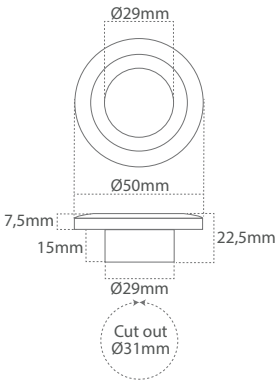



Stainless Steel (SS)


Start with Red light On / Off, Blue light On / Off, White light On / Off

IP 65 | angle 60° | Lm/w 45 | H 50 000 | CCT K 3000 | CCT Red | CCT Blue | CRI >85 | Dim PWM SPST | Indoor/ Outdoor

Product	Power	Input	Material
MAX-STANDARD	3,5w / 1w / 1w	10-32V DC	SS

Max Special



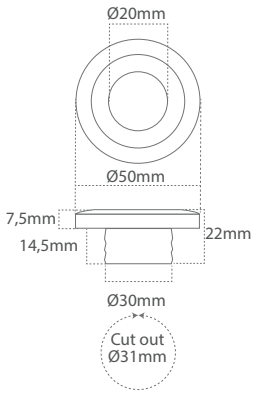



Stainless Steel (SS)
Clear lens (CL)



Stinless Steel (SS)
Milky lens (ML)

Start with White light On / Off, Red light On / Off

IP 65 | angle 40-50° | Lm/w 75 | H 50 000 | CCT K 3000 | CCT Red | CRI >85 | Dim PWM | Indoor/ Outdoor

Product	Power	Input	Material
MAX-SPECIAL-CL	2,6w / 1w	10-32V DC	SS
MAX-SPECIAL-ML	2,6w / 1w	10-32V DC	SS

Customized Reading lights in stainless steel

Malene, Martha and Mary stainless steel lights can be customized with different base and flexarm after your desire and needs

The lamp head and flexarm can be assembled with 2 different versions of lamp bases. Wall model for mounting on a vertical surface and Table model for mounting on a horizontal surface.

Lamp bases have USB A or USB C charger.

All flexarms are made with stainless steel inner core and brass chrome plate outside. Flexarm can be covered with leather or silicone in different color available to match your specific design style, or a specific color can be customized on request.

White Silicone



Black Silicone



Chrome



Copyright Rolf Nachbar

Customized Reading lights in aluminium

Malene and Mary aluminium lights can be customized with different base and flexarm after your desire and needs

Our flexarms come in basic lengths of 130mm, 200mm and 290mm, however other lengths can be customized on request.




130mm 200mm 290mm

Black Leather Light Brown Leather Dark Brown Leather

	Short code	Standard	Small	Mini
White Silicone	S-WH	290mm	200mm	130mm
Black Silicone	S-BL	290mm	200mm	130mm
Stainless Steel	SS	290mm	200mm	130mm
Black Leather	L-BL	290mm	200mm	130mm
Light Brown Leather	L-LIBR	290mm	200mm	130mm
Dark Brown Leather	L-DRBR	290mm	200mm	130mm


Copyright N. krauss/Hamburg




On / Off Touch switch.
Hold for dimming.

Dimming function remember your last setting after being turned off.

	Short code	Standard	Small	Mini
White Silicone	S-WH	290mm	200mm	130mm
Black Silicone	S-BL	290mm	200mm	130mm
Stainless Steel	SS	290mm	200mm	130mm
Black Leather	L-BL	290mm	200mm	130mm
Light Brown Leather	L-LIBR	290mm	200mm	130mm
Dark Brown Leather	L-DRBR	290mm	200mm	130mm

Martha Glass Wall - w/USB / Touch Dim / Memory







MARTHA-GLASS-WALL
Stainless steel
Mirror polished (SS-PO)



USB-A

USB-C




MARTHA-GLASS-WALL
Stainless steel
Brushed surface (SS-BR)

IP 20 | angle 40° | Lm/w 50 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Finish	Power	Input	Material
MARTHA-GLASS-WALL-USB-A	SS-PO / SS-BR	2,5w	10-30 V DC	SS
MARTHA-GLASS-WALL-USB-C	SS-PO	2,5w	10-30 V DC	SS

Martha Wall - w/USB / Touch Dim / Memory







MARTHA-WALL
Stainless steel (SS)



USB-A




USB-C

IP 20 | angle 40° | Lm/w 93 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Finish	Power	Input	Material
MARTHA-WALL-USB-A	SS	1,5w	10-30 V DC	SS
MARTHA-WALL-USB-C	SS	1,8w	10-30 V DC	SS

Mary Wall - w/USB / Touch Dim / Memory







MARY-WALL
Stainless Steel (SS)



MARY-WALL
Black (BL)




MARY-WALL
Grey (GR)

IP 20 | angle 40° | Lm/w 93 | Lm/w 87 | H 40 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Finish	Power	Input	Material
MARY-WALL	SS	1,8w	10-30 V DC	SS
MARY-WALL	BL / GR	1,5w	10-30 V DC	Alu

Mette Flex - w/USB-C / Touch Dim / Memory









On / Off Touch switch.
Hold for dimming.

Dimming function remember your last setting after being turned off.

METTE-FLEX
Flex L-BL-290


IP 20 | angle 40° | Lm/w 77 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am


Product	Flex	Power	Input	Material
METTE-FLEX	L-BL-290	2,5w	10-30 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Martha Glass Flex - w/USB / Touch Dim / Memory









MARTHA-GLASS-FLEX
TABLEBASE
Flex SS-290mm




MARTHA-GLASS-FLEX
WALLBASE
Flex SS-290mm


IP 20 | angle 40° | Lm/w 50 | Lm/w 77 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MARTHA-GLASS-FLEX-TABLEBASE	SS-290	1,5 / 2,5w	10-30 V DC	SS
MARTHA-GLASS-FLEX- WALLBASE	SS-290	1,5 / 2,5w	10-30 V DC	SS

Martha Flex - w/USB / Touch Dim / Memory









MARTHA-FLEX
TABLEBASE
Flex SS-290mm




MARTHA-FLEX
WALLBASE
Flex SS-290mm


IP 20 | angle 40° | Lm/w 93 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MARTHA-FLEX-TABLEBASE	SS-290	1,5w	10-30 V DC	SS
MARTHA-FLEX- WALLBASE	SS-290	1,5w	10-30 V DC	SS

Mary Flex - w/USB / Touch Dim / Memory









MARY-FLEX
Stainless Steel (SS)
TABLEBASE
Flex SS-290mm



MARY-FLEX
Stainless steel (SS)
WALLBASE
Flex SS-290mm



MARY-FLEX
Black (BL)
TABLEBASE
Flex SS-200mm




MARY-FLEX
Gray (GR)
TABLEBASE
Flex SS-200mm

IP 20 | angle 40° | Lm/w 87 | H 50 000 | CCT K 3000 | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MARY-FLEX-SS-TABLEBASE	SS-290	1,8w	10-30 V DC	SS
MARY-FLEX-SS-WALLBASE	SS-290	1,8w	10-30 V DC	SS
MARY-FLEX-BL-TABLEBASE	SS-200	1,5w	10-30 V DC	Alu
MARY-FLEX-GR-TABLEBASE	SS-200	1,5w	10-30 V DC	Alu

Casolux Marine light

Marine light system

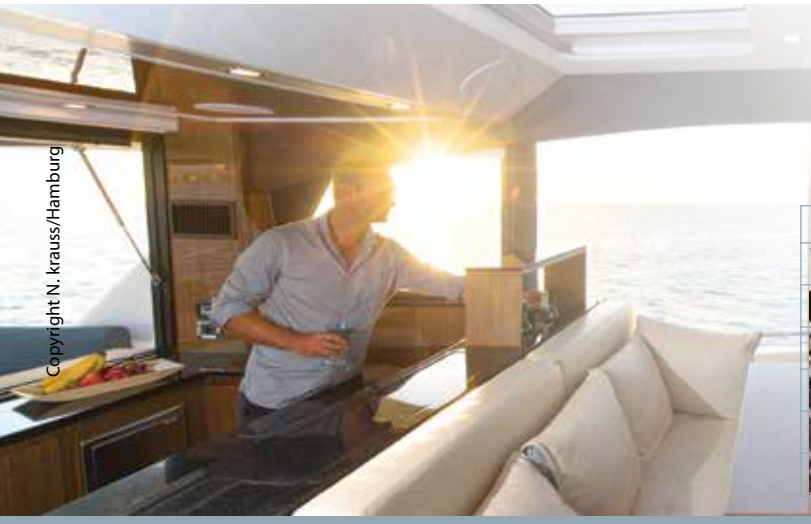



Touch switch to change between white and red light.


Hold for dimming on white light.

Dimming function remember your last setting after being turned off.

	Short code	Standard	Small	Mini
White Silicone	S-WH	290mm	200mm	130mm
Black Silicone	S-BL	290mm	200mm	130mm
Stainless Steel	SS	290mm	200mm	130mm
Black Leather	L-BL	290mm	200mm	130mm
Light Brown Leather	L-LIBR	290mm	200mm	130mm
Dark Brown Leather	L-DRBR	290mm	200mm	130mm

Malene Stainless Steel - w/USB / Touch Dim / Memory



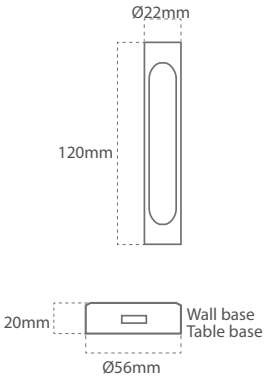


MALENE TABLE
Stainless steel (SS)
Flex SS-290mm


MALENE WALL
Stailess steel SS
Flex L-DRBR-290mm




TABLEBASE



WALLBASE

IP 20 | angle 110° | Lm/w 77 | H 50 000 | CCT WW/RED | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MALENE-TABLE-SS	SS-290	2w	10-29 V DC	SS
MALENE-WALL-SS	L-DRBR-290	2w	10-29 V DC	SS

Malene Black Aluminium - w/USB / Touch Dim / Memory



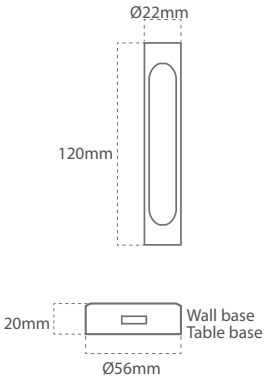


MALENE-TABLE-
BLACK
Flex S-BL 290mm


MALENE-WALL
BLACK
Flex L-BL 290mm




TABLEBASE



WALLBASE

IP 20 | angle 110° | Lm/w 77 | H 50 000 | CCT WW/RED | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MALENE-TABLE-BLACK	S-BL-290	2w	10-29V DC	Alu
MALENE-WALL-BLACK	L-BL-290	2w	10-29V DC	SS

Malene Flatbase - Touch Dim / Memory



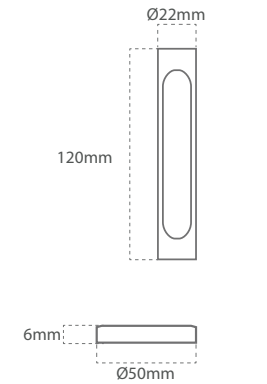


MALENE FLATBASE
Stainless steel (SS)
Flex S-WH-290mm

IP 20 | angle 110° | Lm/w 77 | H 50 000 | CCT WW/RED | CRI >90 | Dim Touch Dim w/memory | Indoor


Product	Flex	Power	Input	Material
MALENE-FLATBASE-SS	S-WH-290	2w	10-29 V DC	SS

Malene CB - w/USB C / Touch Dim / Memory



News

MALENE CB
Black (BL)
Flex L-BL-290mm

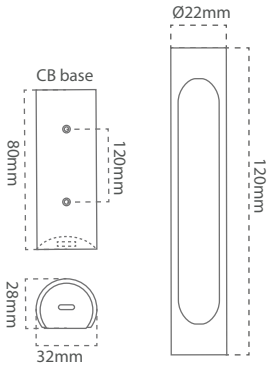



MALENE CB
Chrome (CH)
Flex S-BL-290mm



USB C



Black base

Chrome Base


IP 20 | angle 110° | Lm/w 77 | H 50 000 | CCT WW/RED | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Flex	Power	Input	Material
MALENE-CB-BL	L-BL-290	2w	10-29 V DC	ALU
MALENE-CB-CH	S-BL-290	2w	10-29 V DC	ALU

Malene SL - w/USB / Touch Dim / Memory



News





USB C



IP 20 | angle 110° | Lm/w 77 | H 50 000 | CCT WW/RED | CRI >90 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am


Product	Flex	Power	Input	Material
MALENE-SL-BL-TABLE	S-BL-290	2w	10-29 V DC	ALU



Copyright Hasselblad HSD

Samsoe








IP 67 | angle 40° | Lm/w 83 | H 40 000 | CCT K 3000 | CCT K 4000 | CRI >85 | Indoor/Outdoor

Product	Power	Input	Material
SAMSOE-FLEX-CW	3w	10-30 V DC	Alu
SAMSOE-FLEX-WW	3w	10-30 V DC	Alu

Mary Flex Special








IP 20 | angle 45° | Lm/w 80 | H 40 000 | CCT K 3000 | CRI >83 | Indoor

Product	Power	Input	Material
MARY-FLEX-SPECIAL	2w	10-30 V DC	Alu


Zoom Flex

News









IP 20 | Lm/w 60 | H 30 000 | CCT K 3000 | CRI >80 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am


Product	Power	Input	Material
ZOOM	2w	10-30 V DC	Alu

Only manufactured on request. Contact Casolux for more information.


Zoom

News










IP 20 | Lm/w 60 | H 30 000 | CCT K 3000 | CRI >80 | Dim Touch Dim w/memory | Indoor | USB 5V, 2Am

Product	Power	Input	Material
ZOOM	1,8w	10-30 V DC	Alu

Mary Flex Mini - w/USB / Touch Dim / Memory






Stainless steel (SS) polished


Grey (GR)



Black (BL)



Product	Flex	Power	Input	Material
MARY-SS-FLEX-MINI	S-BL 130	1,8w	10-30V DC	SS
MARY-BL-FLEX-MINI	S-BL-130	1,5w	10-30V DC	Alu
MARY-GR-FLEX-MINI	S-BL-130	1,5w	10-30V DC	Alu

Mary Wall - Classic version






Aluminum Gray (GR)



Aluminum Black (BL)



Product	Frame	Power	Input	Material
MARY-WALL-CLASSIC	GR	2w	10-30 V DC	Alu
MARY-WALL-CLASSIC	BL	2w	10-30 V DC	Alu

Mary Flex Mini - Classic version






Stainless steel Brushed (SS-BR)


Grey (GR)



Black (BL)



Product	Power	Input	Material
MARY-MINI-CLASSIC-SS-BR	1,5w	10-30 V DC	SS
MARY-MINI-CLASSIC-(GR / BL)	2w	10-30 V DC	Alu

Mary Flex - Classic version



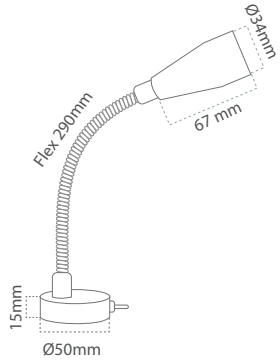


Stainless steel (SS) polished


Black (BL)


Grey (GR)




Product	Power	Input	Material
MARY-CLASSIC-SS	1,5w	10-30 V DC	SS
MARY-CLASSIC-(GR / BL)	2w	10-30 V DC	Alu

Mary up/down



News





Aluminium Black with Stainlesse steel (SS) Case




Aluminium Black (BL)

IP 20 | angle 60° | Lm/w 70 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MARY-UP-DOWN	SS	2 x 3w	10-30 V DC	Alu/SS
MARY-UP-DOWN	BL	2 x 3w	10-30 V DC	Alu

Wallis Round - w/USB and Touch switch






mm	SMALL	LARGE
A	137	185
B	128	140
C	Ø110	Ø160
D	100	155



WALLIS-SMALL-ROUND



WALLIS-LARGE-ROUND




Stainless steeel with fabric lamp shade

IP 20 | angle 100° | Lm/w 170-200 | H 50 000 | CCT K 3000 | Indoor | USB 5V, 1Am

Product	Power	Input	Materiale
WALLIS-SMALL-ROUND	G4 LED Bulb 1,5w	10-30 V DC	SS
WALLIS-LARGE-ROUND	G4 LED Bulb 1,5w	10-30 V DC	SS

Wallis Square - w/USB and Touch switch






mm	SMALL	LARGE
A	137	185
B	128	140
C1	110	160
C2	150	160
D	100	115



WALLIS-SMALL-SQUARE



WALLIS-LARGE-SQUARE




Stainless steeel with fabric lamp shade

IP 20 | angle 100° | Lm/w 170-200 | H 50 000 | CCT K 3000 | Indoor | USB 5V, 2,5Am | USB 5V, 1Am


Product	Power	Input	Material
WALLIS-SMALL-SQUARE	G4 LED Bulb 1,5w	10-30 V DC	SS
WALLIS-LARGE-SQUARE	G4 LED Bulb 1,5w	10-30 V DC	SS

Wallis Special - w/USB and Touch switch









Stainless steeel with fabric lamp shade

IP 20 | angle 100° | angle 40° | Lm/w 170-200 | H 50 000 | CCT K 3000 | CRI >85 | Indoor | USB 5V, 1Am

Product	Power	Input	Material
WALLIS-SPECIAL	G4 LED Bulb 1,5w	10-30 V DC	SS


Only manufactured on request. Contact Casolux for more information.



Mega Yacht lights

Willa





Stainless steeel with fabric lamp shade


IP 20 | angle 100° | Dimmable | Indoor

Product code	LED bulb input / Power	Bulb Input / Power
WILLA	10-30 DC / G4 LED bulb 1,2w	230 AC / E14 Bulb max 40w

Only manufactured on request. Contact Casolux for more information.

Wanda





Stainless steeel with fabric lamp shade


IP 20 | angle 100° | Dimmable | Indoor

Product code	LED bulb input / Power	Bulb Input / Power
WANDA-BED	10-30 DC / G4 LED bulb 1,2w	230 AC / E27 Bulb max 40w

Only manufactured on request. Contact Casolux for more information.

Winnie





Stainless steeel with fabric lamp shade

IP 20 | angle 120° | Dimmable | Indoor


Product code	LED bulb input / Power	Bulb Input / Power
WINNIE	10-30 DC / G4 LED bulb 1,2w	230 AC / E14 Bulb max 40w

Only manufactured on request. Contact Casolux for more information.

Whitney







Stainless steeel with fabric lamp shade


IP 20 | angle 120° | Dimmable | Indoor | USB 5V, 2Am

Product code	LED bulb input / Power	Bulb Input / Power
WHITNEY	10-30 DC / G4 LED bulb 1,2w	230 AC / E14 Bulb max 40w

Only manufactured on request. Contact Casolux for more information.

Wendy





Stainless steeel with fabric lamp shade


IP 20 | angle 120° | Dimmable | Indoor

Product code	LED bulb input / Power	Bulb Input / Power
WENDY	10-30 DC / G4 LED bulb 1,2w	230 AC / E14 Bulb max 40w

Only manufactured on request. Contact Casolux for more information.

Theresa





Stainless steeel with fabric lamp shade


IP 20 | angle 120° | Dimmable | Indoor

Product code	LED bulb input / Power	Bulb Input / Power
THERESA	10-30 DC / G4 LED bulb 1,2w	230 AC / E27 Bulb max 60w

Only manufactured on request. Contact Casolux for more information.

Win up/down






Optional with only light upwards or downwards


IP 65 | angle 2x70° | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
WIN-UP/DOWN	2xGU10 max35w	230 AC / Optional 10-30 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Marian up/down




IP 54 | angle 2x120° | Lm/w 85 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Power	Input	Material
MARIAN-UP/DOWN	2x3w	10-18 V DC / 20-28 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Waki up/down

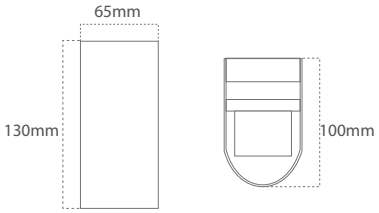



IP 20 | angle 2x40° | Dimmable | Indoor

Product	Power	Input	Material
WAKI-UP/DOWN	1,2w	230 AC / Optional 10-30 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Waki tube





IP 20 | angle 40° | Lm/w 60 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor

Product	Power	Input	Material
WAKI-TUBE	5w	230 AC / Optional 10-30 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Wilma

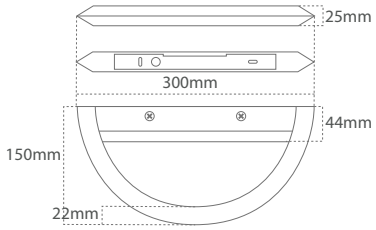



IP 20 | angle 160° | Lm/w 73 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor

Product	Power	Input	Material
WILMA	3w	230 AC / Optional 10-30 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Giulia



Can be made with printed-film surface with any requested motiv.


IP 65 | angle 360° | H 40 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor/Outdoor | Driver

Product	Power	Input	Material
GIULIA-SS	3w	230 AC / Optional 10-30 V DC	SS/Acrylic

Only manufactured on request. Contact Casolux for more information.

Hanne small up/down





Optional in round shape and other sizes


IP 65 | angle 0-100° | Lm/w 50 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
HANNE-S-UP/DOWN	2x3w	230 AC / Optional 10-30 V DC	Alu

Only manufactured on request. Contact Casolux for more information.

Ward






IP 20 | Lm/w 85 | H 50 000 | CCT K 3000 | Indoor | Driver

Product	Power	Input	Material
Ward	1w	350mA	Alu/SS

Only manufactured on request. Contact Casolux for more information.

West Up/Down





mm	A	B	C	D
S	100	100	50	60
M	80	100	50	60
L	80	150	50	60






IP 65 | angle 2x60° | Lm/w 85 | H 50 000 | CCT K 3000 | CRI >80 | Indoor/Outdoor

Product	Power	Input	Material
WEST-UP/DOWN-S	2x5w	220-240 V AC	SS
WEST-UP/DOWN-M	2x5w	220-240 V AC	SS
WEST-UP/DOWN-L	2x5w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

West Special Up/Down





mm	A	B	C	D
S	80	150	50	60
L	100	200	50	60






IP 20 | angle 2x60° | Lm/w 115 | H 50 000 | CCT K 3000 | CRI >80 | Indoor

Product	Power	Input	Material
WEST-SPECIAL-S	2x5w	220-240 V AC	SS
WEST-SPECIAL-L	2x5w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

West Square Up/Down





mm	A	B	C	D
S	80	100	50	60
M	100	100	50	60






IP 65 | angle 2x60° | Lm/w 86 | H 50 000 | CCT K 3000 | CRI >80 | Indoor/Outdoor

Product	Power	Input	Material
WEST-SQUARE-S	2x5w	220-240 V AC	SS
WEST-SQUARE-M	2x5w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

West Surface





mm	SMALL	LARGE
A	80	150
B	120	300




IP 65 | angle 60° | Lm/w 110 | H 50 000 | CCT K 3000 | CRI >80 | Indoor/Outdoor

Product	Power	Input	Material
WEST-SURFACE-S	5w	220-240 V AC	SS
WEST-SURFACE-L	15w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

Wade Special



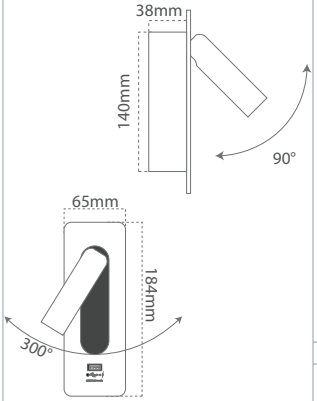


Ø28






IP 20 | Lm/w 60 | H 50 000 | CCT K 3000 | CRI >80 | Indoor | USB 5V, 1Am

Product	Power	Input	Material
WADE-SPECIAL	3w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wade Small Round



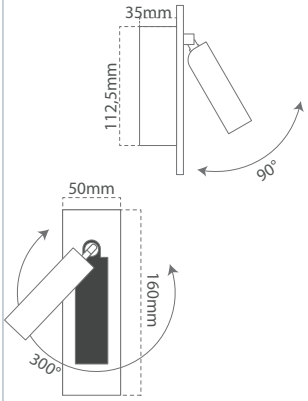


WADE-SMAL
Ø25mm


WADE-SMALL
Ø28mm


IP 20 | Lm/w 85 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WADE-S-Ø25	1w	220-240 V AC	Alu/SS
WADE-S-Ø28	1w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wade Small Square



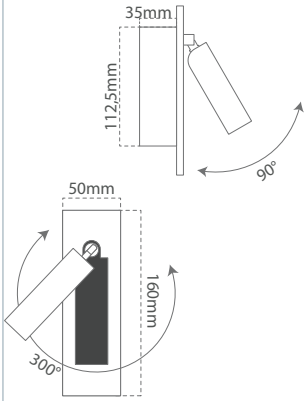


WADE-SQUARE
25x25


IP 20 | Lm/w 85 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WADE-S-SQUARE	1w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wade Large



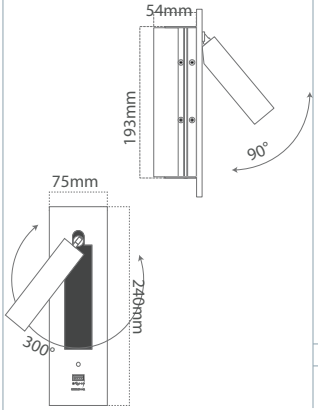






IP 20 | Lm/w 41 | H 50 000 | CCT K 3000 | Indoor | USB 5V, 1Am

Product	Power	Input	Material
WADE-L	3w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wade Surface



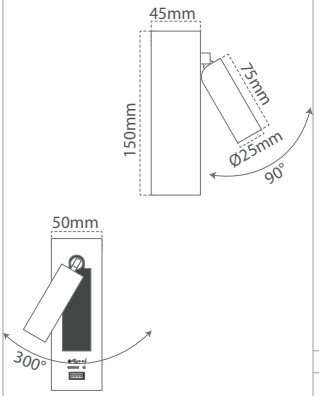




IP 20 | Lm/w 113 | H 50 000 | CCT K 3000 | Indoor | USB 5V, 1Am

Product	Power	Input	Material
WADE-SURFACE	1w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wai Small



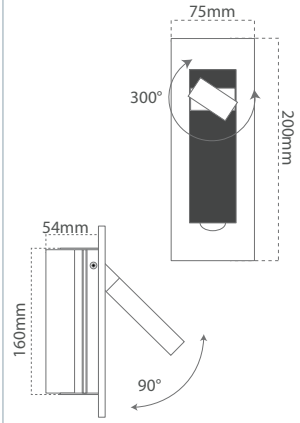




IP 20 | Lm/w 85 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WAI-SMALL	3w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wai Large



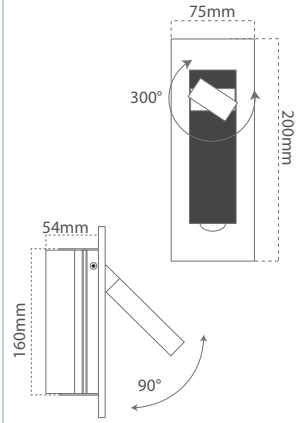




IP 20 | Lm/w 48 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WAI-LARGE	1w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Wren



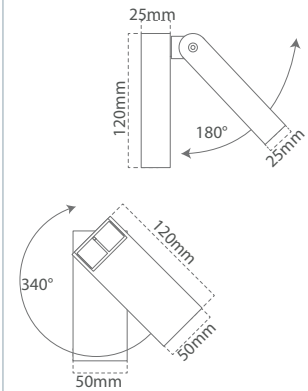




IP 20 | Lm/w 87 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WREN	3w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

Winry



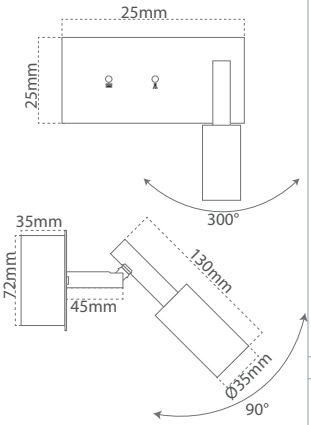




IP 20 | Lm/w 44 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WINRY	3w+2,2w	220-240 V AC	Alu/SS

Only manufactured on request. Contact Casolux for more information.

Bedside - Wireless charger



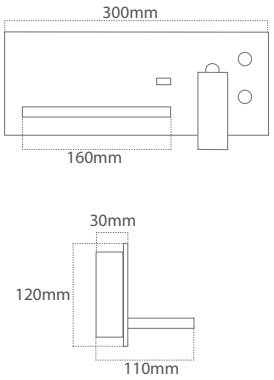


White


Black

Wireless charger and USB charger


IP 20 | H 50 000 | CCT K 3000 | CRI >85 | Indoor

Product	Frame	Power	Input	Material
BEDSIDE-WIRELESS-BLACK	Alu	1,5w	230 AC / 10-32 V DC	Alu
BEDSIDE-WIRELESS-WHITE	Alu	1,5w	230 AC / 10-32 V DC	Alu

Only manufactured on request. Contact Casolux for more information.

Olivia square


OLIVIA SQUARE SMALL
Stainless steel (SS)

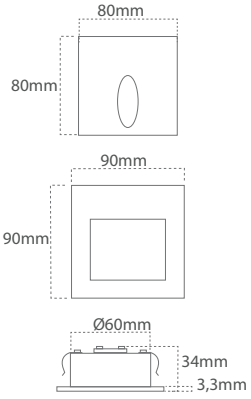


OLIVIA SQUARE
Aluminium White (Alu-WH)


IP 65/67 | angle 40° | Lm/w 68 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor/ Outdoor

Product	IP	Frame	Power	Input	Material
OLIVIA-SQ-SMALL	67	SS	3w	12-24 V DC	SS
OLIVIA-SQUARE	65	Alu-WH	3w	230 AC / 12-24 V DC	Alu

Only manufactured on request. Contact Casolux for more information.

Olivia round


OLIVIA ROUND SMALL
Stainless steel (SS)

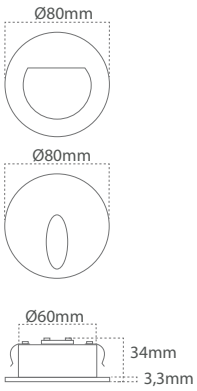


OLIVIA ROUND
Aluminium White (Alu-WH)


OLIVIA ROUND SMALL
Aluminium White (Alu-WH)


IP 65/67 | angle 40° | Lm/w 68 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor/ Outdoor

Product	IP	Frame	Power	Input	Material
OLIVIA-RO-SMALL	67	SS	3w	12-24 V DC	SS
OLIVIA-RO-SMALL	65	Alu-WH	3w	230 AC / 12-24 V DC	Alu
OLIVIA-ROUND	65	Alu-WH	3w	230 AC / 12-24 V DC	Alu

Only manufactured on request. Contact Casolux for more information.

Wright








IP 20 | Lm/w 60 | H 50 000 | CCT K 3000 | Indoor

Product	Power	Input	Material
WRIGHT	3w	220-240 V AC	Alu/SS


Only manufactured on request. Contact Casolux for more information.

Bornholm 100



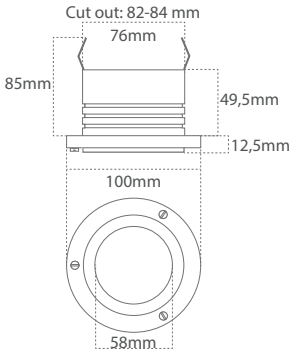





Stainless Steel (SS)


IP 67 | angle 120° | angle 40° | Lm/w 90 | H 50 000 | CCT K 2700 | CRI >85 | Dim PWM | Indoor | Driver

Product	Beam angle	Frame	Power	Input	Material
BORNHOLM-100	120°	SS	3w	350mA	SS/Alu
BORNHOLM-100	40°	SS	3w	500mA	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Bornholm 230



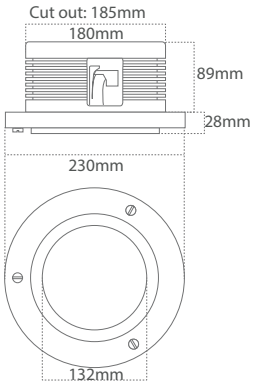



Stainless Steel (SS)

IP 67 | angle 120° | Lm/w 90 | H 50 000 | CCT K 2700 | CRI >85 | Dim PWM | Indoor | Driver

Product	Beam angle	Frame	Power	Input	Material
BORNHOLM-230	120°	SS	20w	750mA	SS/Alu


Only manufactured on request. Contact Casolux for more information.



Copyright N. Krall Hamburg

Malou 90



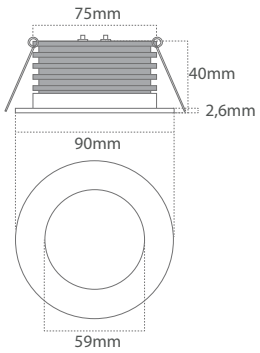



Stainless steel (SS)


IP 67 | angle 120° | Lm/w 90 | H 50 000 | CCT K 2700 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor | Driver

Product	Frame	Power	Input	Material
MALOU-90	SS	6w	500mA	SS/Alu
MALOU-90-DUO	SS	6w/6w	500mA	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Gitte



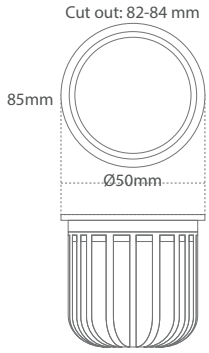





Stainless Steel (SS)


IP 20 | angle 120° | Lm/w 62 | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor | Driver

Product	Beam angle	Frame	Power	Input	Material
GITTE	120°	Alu	6w	350mA	SS/Alu

Only manufactured on request. Contact Casolux for more information.

Dita












IP 20 | angle 15° | Lm/w 85 | H 30 000 | CCT K 4000 | CRI >90 | Indoor

Product	Frame	Power	Input	Material
DITA	Alu-BL	15w	200-240 V AC	Alu

Only manufactured on request. Contact Casolux for more information.

Dita Double Square












IP 20 | angle 2x24° | Lm/w 94 | H 30 000 | CCT K 4000 | CRI >90 | Indoor

Product	Frame	Power	Input	Material
DITA-DOUBLE-SQ	Alu-BL	12w	200-240 V AC	Alu

Only manufactured on request. Contact Casolux for more information.

Lilleholm 90






Stainless steel (SS)


Stainless steel
Brushed (SS-BR)


IP 55 | angle 90° | Lm/w 90 | H 40 000 | CCT K 2700 | CRI >90 | Dim PWM | Indoor | Driver

Product	Frame	Power	Input	Material
LILLEHOLM-90	SS / SS-BR	10w	350mA	SS/Alu

Only manufactured on request. Contact Casolux for more information

Lilleholm 205



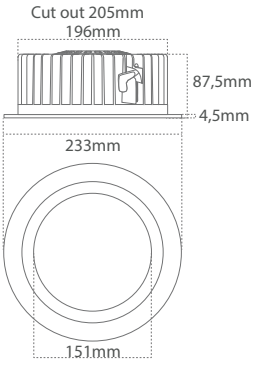



Aluminium White (WH)

IP 55 | angle 90° | Lm/w 95 | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor | Driver

Product	Frame	Power	Input	Material
LILLEHOLM-205	WH (RAL 9003)	30w	840mA	Alu
LILLEHOLM-205	WH (RAL 9010)	30w	840mA	Alu

Devi





mm	A	B
Ø100	100	90
Ø120	120	100
Ø150	150	110








IP 65 | angle 60° | Lm/w 115 | H 50 000 | CCT K 3000 | CRI >80

Product	Frame	Power	Input	Material
DEVI-Ø100	SS	10w	220-240 V AC	SS
DEVI-Ø120	SS	15w	220-240 V AC	SS
DEVI-Ø150	SS	20w	220-240 V AC	SS

Only manufactured on request. Contact Casolux for more information.

Dia





mm	Ø80	Ø100	Ø120	Ø150
A	80	100	120	150
B	80	85	95	110





IP 20/65 | angle 60° | Lm/w 115 | H 50 000 | CCT K 3000 | CRI >80

Product	IP	Frame	Power	Input	Material
DIA-Ø80	20/65	SS	10w	220-240 V AC	SS
DIA-Ø100	65	SS	10w	220-240 V AC	SS
DIA-Ø120	65	SS	15w	220-240 V AC	SS
DIA-Ø150	65	SS	20w	220-240 V AC	SS


Only manufactured on request. Contact Casolux for more information.



Motorhome lights

Rikke 1,3w Non Dimmable








IP 65 | angle 90° | Lm/w 56 | H 50 000 | CCT K 3000 | CRI >85 | Indoor/Outdoor

Product	Frame	Power	Input Volt	Material
RIKKE	CH	1,3W	10-32V AC/DC	Plastic
RIKKE	WH	1,3W	10-32V AC/DC	Plastic

Rikke 1,5w Dimmable








IP 65 | angle 90° | Lm/w 56 | H 50 000 | CCT K 3000 | CCT Red | CRI >85 | Dim PWM | Indoor/Outdoor


Product	Frame	Power	Input Volt	Material
RIKKE-DIM	CH / WH	1,5W	10-32V AC/DC	Plastic
RIKKE-DIM-RED	CH / WH	1,5W	10-32V AC/DC	Plastic

Rie





	Rie Small	Rie
A	Ø48mm	Ø70mm
B	9,5mm	9,5mm

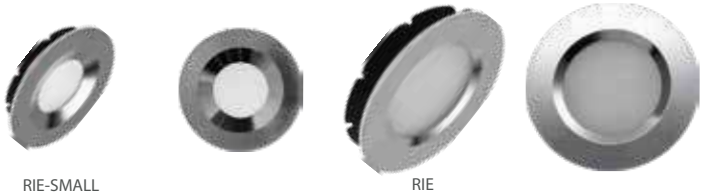


RIE-SMALL RIE


IP 20 | CCT K 3000 | Indoor

Product	Frame	Power	Input	Material
RIE-SMALL	Plastic-Chrome	1w	10-18 / 10-30 V DC	Plastic
RIE	Plastic-Chrome	1,8w	10-18 / 10-30 V DC	Plastic

Only manufactured on request. Contact Casolux for more information.

Molly Downlight - w / Touch

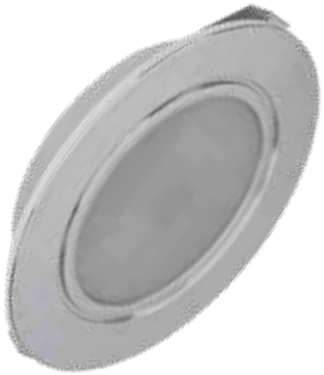






IP 20 | Lm/w 50 | CCT K 3000 | Indoor

Product	Frame	Power	Input	Material
MOLLY-DOWNLIGHT	Plastic-Chrome	2w	12 V DC	Plastic

Only manufactured on request. Contact Casolux for more information.

Molly - Round - Mini Panel







MOLLY ROUND
Steel (S)



Steel and plastic body.
Magnetic front frame


IP 40 | angle 120° | Lm/w 50 | H 20 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MOLLY-ROUND	S	2,6w	10,5-16,5 /10-30 V DC	Plastic/Steel

Only manufactured on request. Contact Casolux for more information.

Molly - Square - Mini Panel







MOLLY SQUARE
Steel (S)




IP 40 | angle 120° | Lm/w 50 | H 20 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MOLLY-SQUARE	S	2,6w	10,5-16,5 /10-30 V DC	Plastic/Steel

Only manufactured on request. Contact Casolux for more information.

Mona - Plastic Panel light





	Mini	Medium
A	170mm	270mm
B	45mm	65mm
C	17mm	17mm




MONA-MINI MONA-MEDIUM

IP 44 | angle 60° | Lm/w 150 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Power	Input	Material
MONA-MINI-PANEL	2,4w	10-30 V DC	Alu/Plastic
MONA-MEDIUM-PANEL	4,8w	10-30 V DC	Alu/Plastic

Mona - Aluminum Panel Light



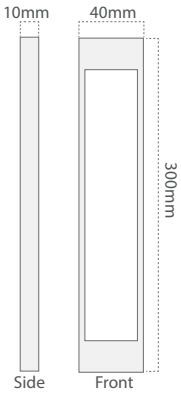




On / OFF Touch switch

IP 20 | angle 120° | Lm/w 58 | H 50 000 | CCT K 3000 | CCT K 4000 | CRI >85 | Indoor

Product	Power	Input	Material
MONA-LIGHT-BAR-CW (4000K)	6w	10-32 V DC	Alu/Plastic
MONA-LIGHT-BAR-WW(3000K)	6w	10-32 V DC	Alu/Plastic

Mocca - Square - Mini Panel







MOCCA-SQUARE Grey (GR) MOCCA-SQUARE Black (BL) Plastic body in Black. Magnetic front frame


IP 40 | angle 120° | Lm/w 45 | H 20 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MOCCA-SQUARE	GR	2,4w	10,5-16,5 / 10-30 V DC	Plastic/Alu
MOCCA-SQUARE	BL	2,4w	10,5-16,5 / 10-30 V DC	Plastic/Alu

Only manufactured on request. Contact Casolux for more information.

Mocca - Rectangel - Mini Panel





mm	A	B	C
MOCCA 100x300	100	300	7
MOCCA 65x200	65	200	7
MOCCA 110x190	110	190	7



MOCCA-RECTANGEL 100 x 300 Grey (GR) MOCCA-RECTANGEL 65 x 200 Steel (S) MOCCA-RECTANGEL 110 x 190 Steel (S) MOCCA-RECTANGEL 65 x 200 Black (BL)

Steel or Plastic body. Magnetic front frame




IP 40 | angle 60° | Lm/w 40-45° | H 20 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor

Product	Frame	Power	Input	Material
MOCCA-RECTANGEL-100x300	GR	7,2w	10,5-16,5 / 10-30 V DC	Plastic/Alu
MOCCA-RECTANGEL-65x200	S / BL	4w	10,5-16,5 / 10-30 V DC	Plastic/Steel
MOCCA-RECTANGEL-110x190	S	4,8w	10,5-16,5 / 10-30 V DC	Plastic/Steel

Only manufactured on request. Contact Casolux for more information.

Cabinet light - Square







IP 20 | angle 120° | Lm/w 59 | H 50 000 | CCT K 3000 | CRI >85 | Indoor


Product	Power	Input	Material
CABINET-SQUARE-192x112	6w	10-16 V DC	Alu




Waco

News











IP 54 | angle 40° | Lm/w 90 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | Indoor

Product	Power	Input	Material
WACO-TOUCH-DOWN	3w	10-30 V DC	Alu

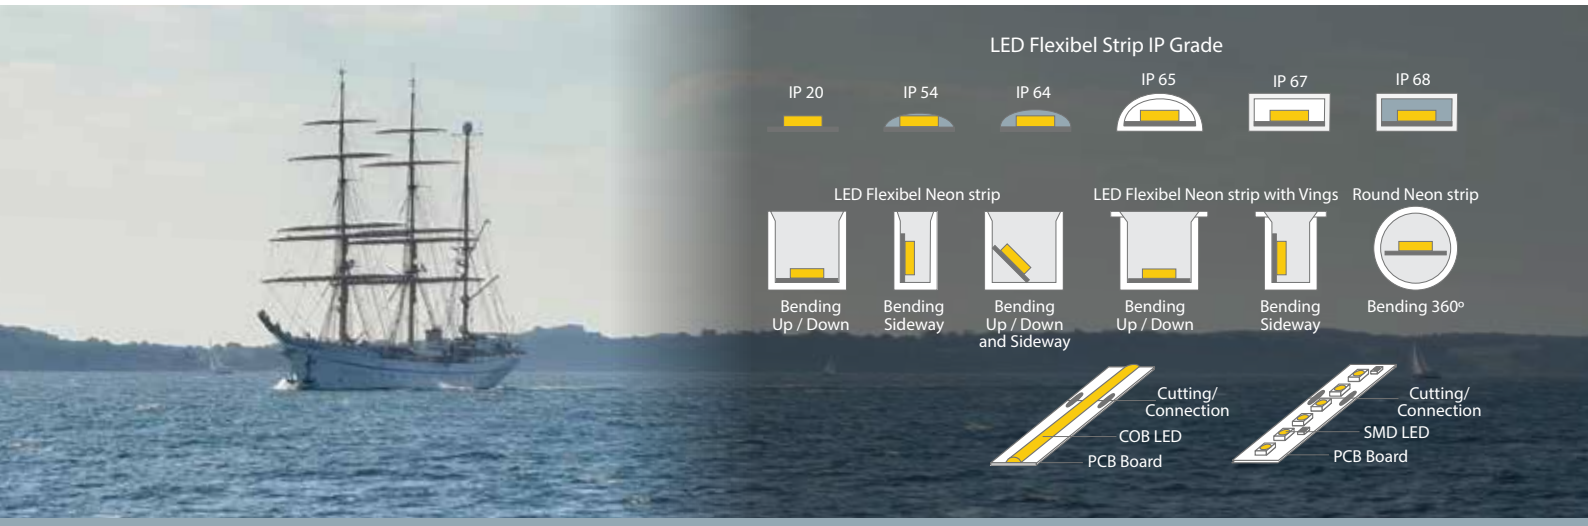

COB Led-Flexible Strip - IP20








IP 20 | angle 120° | CCT K 3000 | CRI >90 | Dim PWM | Indoor

Product	Led's pr.meter	Power	Input
COB-IP20-5MM	480 pcs	4 / 7 w/m	12 / 24 V DC
COB-IP20-8MM	480 pcs	9 w/m	12 / 24 V DC
COB-IP20-10MM	480 pcs	10 w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

COB Led-Flexible Strip - RGB - IP20








IP 20 | angle 120° | CCT RGB | Dim PWM | Indoor

Product	Led's pr.meter	Power	Input
COB-IP20-RGB	896 pcs	20w/m	12 / 24 V DC

Only manufactured on request. Contact Casolux for more information.

COB Led-Flexible Silicone Strip - IP67








UV protected


IP 67 | angle 120° | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor/ Outdoor

Product	Led's pr.meter	Power	Input
COB-IP67-10x5	480 pcs	4 / 7 w/m	12 / 24 V DC

Only manufactured on request. Contact Casolux for more information.

COB Led-Flexible Silicone Strip - IP67 - Opal Silicone Sleeve

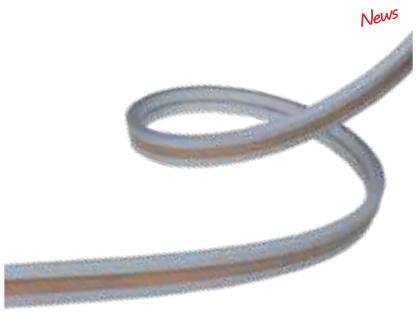





UV protected


IP 67 | angle 120° | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
COB-IP67-10x5-opal	480 pcs	4 / 7 w/m	12 / 24 V DC

Only manufactured on request. Contact Casolux for more information.

COB Led-Flexible Silicone Strip - IP68







UV protected


IP 68 | angle 120° | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
COB-IP68-10x5	480 pcs	4 / 7 w/m	12 / 24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible PU Strip 8x9,6mm Sideway 10W IP68







Saltwater, UV and High temperature resistant.

IP 68 | angle 120° | Lm/m 800 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor | 5m Under water


Product	Lenght	Power	Input
CALL24V-8x9,5	5m	8w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible PU Strip 10x10mm 10W IP68



Saltwater, UV and High temperature resistant.





Saltwater, UV and High temperature resistant.


IP 68 | angle 120° | Lm/m 800 | H 50 000 | CCT K 3000 | CCT WW/RED | CRI >85 | Dim PWM | Indoor/Outdoor | 5m Under water

Product	Power	Input
CALL24V-IP68-10x10	10w/m	24 V DC
CALL24V-IP68-10x10-WW/RED	10w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible High Power Strip - IP20








IP 20 | angle 120° | Lm/m 1410 | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor

Product	Led's pr.meter	Power	Input
Line LED-9,6W-IP20	160 pcs	9,6w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Strip - IP54








IP 54 | angle 120° | Lm/m 380 | H 50 000 | CCT K 2700 | CCT K 3000 | CRI >85 | Dim PWM

Product	Led's pr.meter	Power	Input
CALL-12	60 pcs	4,8w/m	12 V DC
CALL-24	60 pcs	4,8w/m	24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible PU Glue Potted Strip - IP64








IP 64 | angle 120° | Lm/m 720 | H 50 000 | CCT K 3500 | CRI >97 | Dim PWM

Product	Led's pr.meter	Power	Input
CALL-PU-GLUE	120 pcs	9,6w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Side View PU Glue Potted Strip - IP64








IP 64 | angle 120° | Lm/m 380 | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM

Product	Led's pr.meter	Power	Input
CALL-SIDEVIEW-PU-GLUE	60 pcs	4,8w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible - Milky White Silicone Strip - IP65








IP 65 | angle 120° | Lm/m 180 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
CALL-24-MILKY-FLAT	280 pcs	8w/m	24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone Strip - IP67







IP 67 | angle 120° | Lm/m 524 | H 50 000 | CCT K 4000 | CRI >85 | Dim PWM | Indoor/Outdoor


Product	Led's pr.meter	Power	Input
CALL-IP67-R-10x5	60 pcs	4,8w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 10x10 - w/Wings - IP54

News







UV and Flame resistant.


IP 54 | angle 110° | H 36 000 | CCT K 3000 | CRI >80 | Dim PWM


Product	Led's pr.meter	Power	Input
CALL-NEON-WINGS-10x10	120 pcs	8,8w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - Sideway - w/Wings - IP54

News

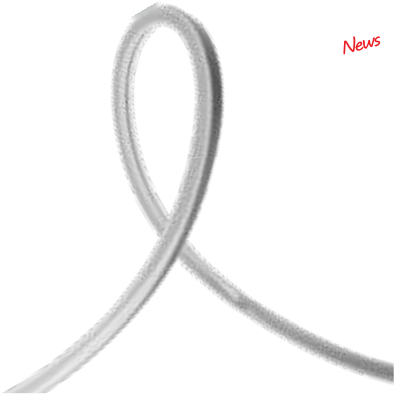



	Small	Medium
A	3mm	6mm
B	6mm	12mm



3 x 6mm



6x12mm

UV and Flame resistant.

IP 54 | angle 120° | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM


Product	Led's pr.meter	Power	Input
CALL-NEON-WINGS-3x6	120 pcs	5w/m	24 V DC
CALL-NEON-WINGS-6x12	120 pcs	5w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible - Silicone Neon Strip - Round - IP65



Bending 360°



	Small	Medium
A	Ø15mm	Ø22mm




UV protected

IP 65 | angle 360° | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor


Product	Input
CALL-NEON-ROPE-Ø15	24 V DC
CALL-NEON-ROPE-Ø22	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 6x6mm - IP67

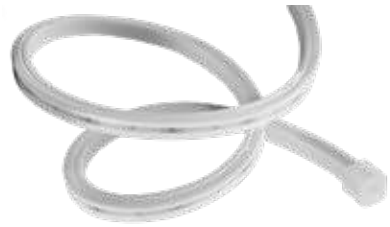

Bending Up / Down






IP 67 | angle 120° | Lm/m 600 | H 30 000 | CCT K 3000 | CRI >85 | Indoor/ Outdoor


Product	Led's pr.meter	Power	Input
CALL-24-NEON-6x6	210 pcs	6-7w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 10x10mm - IP67

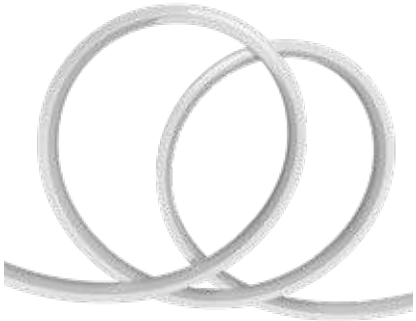

Bending Up / Down





Saltwater, UV and Flame resistant.

IP 67 | angle 150° | Lm/m 250 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/ Outdoor


Product	Led's pr.meter	Power	Input
CALL-NEON-4W-10x10	150 pcs	4w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip 4x7 - Sideway - IP67



Bending SIdeway






IP 67 | angle 60° | Lm/m 432 | H 50 000 | CCT K 3000 | CRI >90 | Dim PWM | Indoor/ Outdoor

Product	Led's pr.meter	Power	Input
CALL24V-NEON-SIDEWAY-4x8	210 pcs	7,7w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 4x11mm - Sideway - IP67








IP 67 | angle 60° | Lm/m 181 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
CALL-MILKY-SIDEWAY	128 pcs	7,6w/m	12 / 24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 4,2x10,4mm - Sideway - IP67








IP 67 | angle 600° | Lm/m 181 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
CALL-4,2x10,4-3M TAPE	128 pcs	7,6w/m	12 / 24V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 8x7mm - Sideway - IP67







Saltwater, UV and Flame resistant.

IP 67 | angle 110° | Lm/m 250 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor


Product	Led's pr.meter	Power	Input
CALL12V-NEON-8x7	140 pcs	4w/m	12 V DC
CALL24V-NEON-8x7	140 pcs	4w/m	24 V DC

Lenghts/Watts/CCT can be manufactured on request. Contact Casolux for more information.

Led-Flexible Silicone NEON Strip - 3D Bending - IP67

News





	Small	Medium	Large
A	8mm	10mm	16mm
B	8mm	10mm	15mm



Saltwater, UV and Flame resistant.


IP 65 | angle 120° | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Led's pr.meter	Power	Input
CALL24v-3D-8x8	120 pcs	10w/m	24 V DC
CALL24v-3D-10x10	120 pcs	10w/m	24 V DC
CALL24v-3D-16x15	120 pcs	10w/m	24 V DC

Only manufactured on request. Contact Casolux for more information.

Drejoe Tri Proof IP69K








IP 69K | angle 120° | Lm/w 110-150 | H 50 000 | CCT K 4-5000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
DREJOE-XSMALL	15w	230 V AC / 24 V DC / 10-32 V DC	SS / PC / HDPE
DREJOE-SMALLL	20w	230 V AC / 24 V DC / 10-32 V DC	SS / PC / HDPE

Other Lenghts/Watts can be manufactured on request. Contact Casolux for more information.

Roemoe








IP 65 | angle 120° | Lm/w 85 | H 50 000 | CCT K 4000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
ROEMOE-SMALL	16w	100-270 V AC	Alu
ROEMOE-LARGE	32w	100-270 V AC	Alu

Barsoe






BARSOE	L	W	D
SPECIAL	108mm	108mm	59mm
MEDIUM	80mm	300mm	65mm


MEDIUM


SPECIAL




IP 68 | angle 15-80° | Lm/w 70-80 | H 50 000 | CCT K 6000 | CRI >85 | Dim PWM | Indoor/Outdoor

Product	Power	Input	Material
BARSOE-MEDIUM-COMBO	72w	10-30 V DC	Alu
BARSOE-SPECIAL-SPOT	48w	10-30 V DC	Alu
BARSOE-SPECIAL-FLOOD	48w	10-30 V DC	Alu

Other Lenghts/Watts can be manufactured on request. Contact Casolux for more information.

Mega Flood Light







Saltwater and UV resistant.


IP 66 | angle 36° | Lm/w 85 | H 100 000 | CCT K 5000

Product	Power	Input	Material
MEGA-FLOODLIGHT	350w	100-277 V AC	Alu
MEGA-FLOODLIGHT	600w	100-277 V AC	Alu


Only manufactured on request. Contact Casolux for more information.

Langeland





LANGELAND ALUMINUM



LANGELAND SS



Stainless Steel (SS)



Gray Aluminium (Alu)




IP 68 | angle 30-60° | Lm/w 65-74 | H 50 000 | CCT K 3000 | CCT K 4000 | CRI >85 | Dim PWM | Indoor/Outdoor | 5m Under water

Product	Power	Input Volt	Material
LANGELAND-SS	11,5w	24 V DC	SS
LANGELAND-Alu	11,5w	24 V DC	Alu

Underwater Drain Light












IP 68 | angle 30-60° | Lm/w 83 | H 50 000 | CCT K 4500 | CCT Blue | 5m Under water

Product	Power	Input	Material
UNDERWATER-4500K	6w	12V DC	PA
UNDERWATER-BLUE	6w	12V DC	PA

Underwater Light Surface Mounted





	Small	Large
Length	210mm	290mm
Width	80mm	110mm
Depth	30mm	30mm



Small




Large

IP 68 | angle 120° | Lm/w 90 | H 40 000 | CCT K 4500 | 20m Under water

Product	Power	Input	Material
UNDERWATER-SMALL	10w	12V AC/DC	PLA
UNDERWATER-LARGE	20w	12V AC/DC	PLA

Spirholm



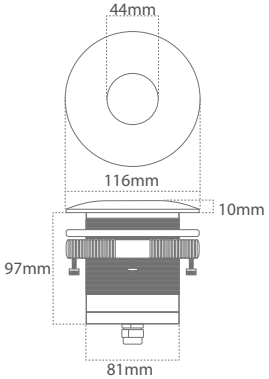



Stainless Steel (SS)

IP 68 | angle 25° | Lm/w 57 | H 50 000 | CCT K 3000 | CRI >80 | Dim PWM | 5m Under water

Product	Power	Input	Material
SPIRHOLM	15w	24 V DC	SS

Only manufactured on request. Contact Casolux for more information.

Copyright Rolf Nachbar

Illuminated Sign



Customized LED illuminated signs.

Three-dimensional lettering, personalized logos and symbol design.
316 grade mirror-polished stainless steel.
Halo light effects, side or edge lighting, back lighting or front lighting.


Contact tg@casolux.com for more information.





Elin small — Magnetic induction







Electromagnetic induction plug and socket. No cabel

Optional in different light colours and beam angles


IP 68 | angle 25-60° | Lm/w 31 | H 50 000 | CCT K 3000 | CRI >85 | Dim PWM | Indoor/Outdoor | 5m Under water

Product	Power	Input	Material
ELIN-SMALL	3w	230 V AC / 24 V DC	SS/Nylon

Only manufactured on request. Contact Casolux for more information.

Cabinet light - Round







Bottom w/charger input



Top w/Finger Touch



Brakcet for screw, with magnet and 3M tape


Short touch: 1 4000K
2 6000K
3 3000K
4 flashing light
5 OFF
Long press: Stepless dimming

IP 20 | angle 120° | Lm/w 80 | H 40 000 | CCT K 3-6000 | Indoor

Product	Power	Battery	Input	Material
CABINET-RO	2,3w	3,7 V. 2000mAh	5 V. 800 mA	Alu

Pia Magnetic — Emergency light with Remote control









Micro USB input

Step: 1 White light 3%
2 White light 100%
3 OFF
Long press Power off

Dobble press for Red light
1 Red light 100%
2 flashing light OFF
3 OFF




Infrared Remote control

IP 54 | angle 90° | Lm/w 100 | H 35 000 | CCT K 5700 | Indoor

Product	Power	Battery	Input	Material
PIA-REMOTE	1w	3,7 V. 2000mAh	5 V. 700 mA	PC

Pia — Emergency light and Powerbank





	PIA SMALL	PIA LARGE
Length	143mm	262mm
Weight	130g	210g



PIA SMALL
In mangnet holder



PIA LARGE

Micro USB input



USB output

PIA-SMALL
Step: 1 White light 10%
2 White light 100%
3 Red light 100%
4 Red flash 100%
5 SOS 100%
6 OFF

PIA LARGE
Step: 1 White light 8%
2 White light 30%
3 White light 100%
4 Flash 8%
5 OFF

IP 68 | angle 120° | Lm/w 100 | H 36 000 | CCT K 5700 | Indoor/Outdoor | 2m Under water

Product	Power	Battery	Input	Material
PIA-SMALL	1w	3,7 V. 2600mAh	5 V. 800 mA	PC
PIA-LARGE	3w	3,7 V. 5200mAh	5 V. 2000 mA	PC

Led Bulb G4 Replacement for halogen bulbs


CABU-G4-M11


CABU-G4-M12


CABU-G4-M13



CABU-G4-M14


CABU-G4-M15


CABU-G4-M17


CABU-G4-M18


CABU-G4-HL



CCT K 3000 Dimmable


Product code	Power	Input Volt	Lumen	Beam Angle	(A)	(B)	(C)
CABU-G4-M11	0,8w	10-30 V DC	60-90	360	10mm	19mm	30mm
CABU-G4-M12	1w	10-30 V DC	110-130	360	10mm	29mm	39mm
CABU-G4-M13	1w	10-30 V DC	80-100	360	10mm	26mm	36mm
CABU-G4-M14	1,1w	10-30 V DC	90-110	180	11mm	24mm	30mm

Product code	Power	Input Volt	Lumen	Beam Angle	(A)	(B)	(C)
CABU-G4-M15	1,5w	10-30 V DC	150-170	360	13mm	28mm	38mm
CABU-G4-M17	1,1w	10-30 V DC	100-120	360	10mm	19mm	30mm
CABU-G4-M18	1,6w	10-30 V DC	180-200	180	10mm	29mm	39mm
CABU-G4-HL	2,5w	10-30 V DC	250-300	360	13mm	33mm	43mm

LED Power Supply 8/36W


CAD-8-12


CAD-35-12




IP 42 Indoor

Product code	Power	Efficienty	Input Volt	Output Volt
CAD-8-12	8,04w	>80%	100-240 AC	12 DC - 0,67A
CAD-35-12	36w	>83%	100-240 AC	12 DC - 3,0A

LED Power Supply 150W


CAD-150



IP 67 Indoor/ Outdoor

Available as no dim, 1-10V, 10v PWM signal and resistance.

Product code	Power	Efficienty	Input Volt	Output Volt
CAD-150W-12	150w	>91,5%	100-240 AC	12 DC - 12,5A
CAD-150W-24	150w	>93%	100-240 AC	24 DC - 6,3A

LED Dimmer / RGB/TW


CAD-1248-1CH


CAD-1248-2CH


CAD-1248-3CH

IP 20 Indoor

Product code	Dimension	Efficienty	Input Volt	Output
CAD-1248-1CH	45x58x25mm	>95%	12-24 DC	1 x 8A max
CAD-1248-2CH	44x44x25mm	>95%	12-48 DC	2 x 1,6A max
CAD-1248-3CH	44x44x25mm	>95%	12-48 DC	3 x 1,6A max

LED Dimmer / Bluetooth


CADB-1224-4CH-BLE


CADB-1248-1CH-BLE


Bluetooth dimming App. BlueDimmer

IP 20 Indoor

Product code	Dimension	Efficienty	Input Volt	Output
CADB-1224-4CH-BLE	88x54x26mm	>95%	12-24 DC	4 x 5A
CADB-1248-1CH-BLE	44x57x25mm	>95%	12-48 DC	1 x 8A

LED Driver


Small


Medium



Large

IP 20 Indoor


Product code	Power	Input Volt	Output Volt
LED DRIVER SMALL	20w	200-240 AC	24 DC - 0,83A
LED DRIVER MEDIUM	50w	200-240 AC	24 DC - 2,08A
LED DRIVER LARGE	75w	200-240 AC	24 DC - 3,13A

DC-DC Converter



30W




200W




480W



IP 20 Indoor

Product code	Power	Efficienty	Input Volt	Output Volt
CA-DC/DC-30W-12	30w	>86,5%	9-36 DC	12 DC - 2,5A
CA-DC/DC-30W-24	30w	>86,5%	9-36 DC	24 DC - 5A
CA-DC/DC-200W-12	200w	>91%	9-36 DC	12 DC - 16,7A
CA-DC/DC-480W-12	480w	>86%	19-72 DC	12 DC - 21A


Sønderborg
Denmark

CASOLUX®

The lights of tomorrow

info@casolux.com
www.casolux.com
Tlf. +45 7445 0005
6400 Sønderborg
Denmark