# Casolux Marine light

Marine light system

## CLEO GB

| IP65 | 25-65° | Power | Efficiency | Lifetime | Input | Material | CE |
|---|---|---|---|---|---|---|---|
| | | 0,6 w | 15 Lm/w | 35.000 Hours (70% Lumen maintenance) | 10-32 VDC | Stainless steel | |



CLEO ROUND (RO)



SS-WH

SS-BL



CLEO SQUARE (SQ)



SS-WH

SS-BL



CLEO ROUND 25° (RO25)



SS-WH

SS-BL




CLEO SQUARE 34° (SQ34)




SS-WH

SS-BL

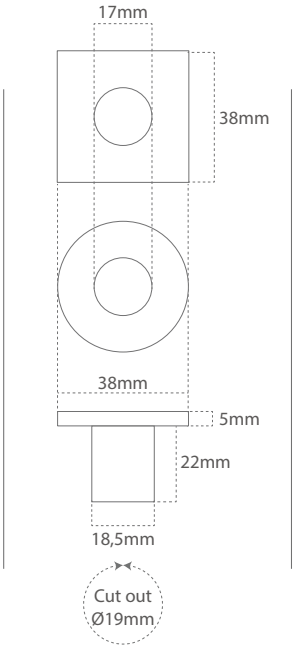


Side



Back (RO)



Back (SQ)




Mounting bracket



| Product code | Front Colour/Quality | IP | Lumen | Beam | Power | Volt | CCT | CRI |
|---|---|---|---|---|---|---|---|---|
| CLEO-SS-RO | SS / SS-WH / SS-BL | IP65 | 9 | 65° | 0,6 W | 10-32 VDC | 3000 K | > 85 |
| CLEO-SS-RO25 | SS / SS-WH / SS-BL | IP65 | 9 | 25° | 0,6 W | 10-32 VDC | 3000 K | > 85 |
| CLEO-SS-RO25-2700 | SS / SS-WH / SS-BL | IP65 | 9 | 25° | 0,6 W | 10-32 VDC | 2700 K | > 85 |
| CLEO-SS-SQ | SS / SS-WH / SS-BL | IP65 | 9 | 65° | 0,6 W | 10-32 VDC | 3000 K | > 85 |
| CLEO-SS-SQ34 | SS / SS-WH / SS-BL | IP65 | 9 | 34° | 0,6 W | 10-32 VDC | 3000 K | > 85 |

### Feature

- Courtesy and orientation lighting.
- Stainless steel ensures corrosion free product in damp enviroment.
- IP65 design sealed to withstand moisture.

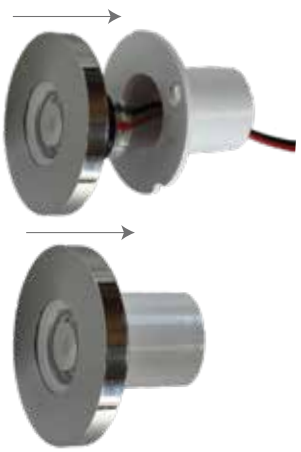

### Material

- Front: SS316L Stainless steel
- Plastic mounting module
- Plastic mounting bracket with 3M VHB Tape

### Benefit

- High reliability
- Maintenance free

### Application

- Marine light