MAJA Downlight

GB

IP65 | 85-90° | Power **3,6 w** | Efficiency **56 Lm/w** | Lifetime **50.000 Hours** (70% Lumen maintenance) | Input **10-32 VDC** | Material **Stainless steel Aluminum** | CE



MAJA ROUND (SS)
Stainless steel



MAJA SQUARE (SS)
Stainless steel



MAJA ROUND (SS-WH)
Stainless steel painted white




MAJA SQUARE (SS-W)
Stainless steel painted white




MAJA ROUND W/COVER (SS)
Rustfrit stål

ROUND



SQUARE

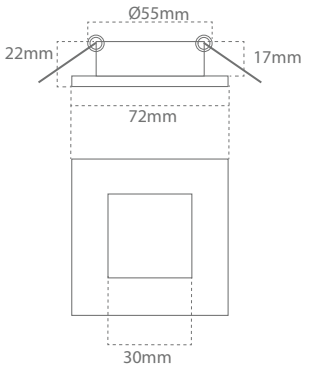

Product code	Lumen output	Beam	Power	CCT	CRI
MAJA-ROUND-SS	204 lm	90°	3,6W	3000K	> 85
MAJA-ROUND-SS-WW/RED	204 lm	90°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-ROUND-SS-WH	204 lm	90°	3,6W	3000K	> 85
MAJA-ROUND-SS-WH-WW/RED	204 lm	90°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-SS	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-SS-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-SS-WH	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-SS-WH-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85

Feature

- IP65 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Stainless steel ensures corrosion free product in damp environment
- PWM-dimmable
- Optional in Warm White 3000K with RED light



Mounted with
springs or screws

Material

- SS: Stainless steel
- Aluminium

Benefit

- High reliability
- Maintenance free

Application

- Marine light