MARIA - A3

GB

IP65	120°	Power	Efficiency	Lifetime	Input	Material	CE
		2 - 3 W	**58-68 Lm/w**	**50.000 Hours** (70% Lumen maintenance)	**10-32 V AC/DC**	**Stainless steel Aluminum**	



Stainless Steel (SS)



Stainless Steel (SS)




Black(BL)



White (WH)



Grey (GR)

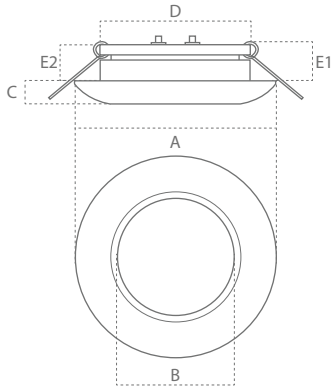

mm	SMALL	LARGE
A	69,5	86
B	40,5	55
C	7	7
D	52	70
E1	14	13,5
E2	12	10,5

Product code	Front Colour/Quality	IP	Lumen	Beam	Power	Volt	CCT	CRI
MARIA-A3-SMALL-2W	SS / BL / GR / WH	IP65	116	120°	2 W	10-32 V AC/DC	3000 K	> 85
MARIA-A3-SMALL-2,5W	SS / BL / GR / WH	IP65	137	120°	2,5 W	10-32 V AC/DC	3000 K	> 85
MARIA-A3-LARGE-3W	SS / BL / GR / WH	IP65	205	120°	3 W	10-32 V AC/DC	3000 K	> 85

Feature

- IP65 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Anodized aluminium heatsink ensures corrosion free product in damp environment
- Dimmable with external PWM

Material

- SS: Stainless steel (SS316L)
- Grey, White and Black: Aluminium
- Opal lens

Benefit

- High reliability
- Maintenance free

Customized solution

- Can be custom made with touch switch

Application

- Marine light

Center Touch (CTO)

