# RIKKE DOWNLIGHT

GB


IP65 | 90° | Power **1,3 - 1,5 w** | Efficiency **94 Lm//w** | Lifetime **50.000 Hours** (70% Lumen maintenance) | Input **10-32 V AC/DC** | Material **Plastic** | CE



RIKKE CHROME (CH)



RIKKE WHITE (WH)

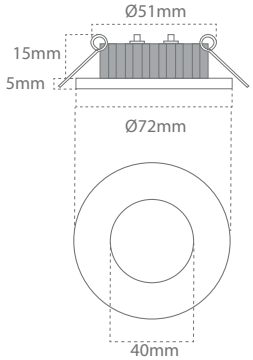




Mounted with springs or screws

| Product code | PWM Dimmable | Lumen | Beam | Power | Volt | CCT |
|---|---|---|---|---|---|---|
| RIKKE-CH-1,3W-10-32V-WW | NO | 122 Lm | 120° | 1,3 W | 10-32 V AV/DC | 3000 K |
| RIKKE-WH-1,3W-10-32V-WW | NO | 122 Lm | 120° | 1,3 W | 10-32 V AV/DC | 3000 K |
| RIKKE-CH-1,5W-10-32V-WW | YES | 142 Lm | 120° | 1,5 W | 10-32 V AV/DC | 3000 K |
| RIKKE-WH-1,5W-10-32V-WW | YES | 142 Lm | 120° | 1,5 W | 10-32 V AV/DC | 3000 K |
| RIKKE-CH-1,5W-10-32V-RED | YES | Red Foil on lens | 120° | 1,5 W | 10-32 V AV/DC | 3000 K |

## Feature

- IP65 design with integral thermal management for long life.
- With bridge rectifier circuit.
- 15 cm long cable with Molex cable connector and pins.
- Mounted with springs or screws.

## Material

- Plastic body
- White or Chrome plated plastic front frame
- Frosted lens


## Benefit

- High reliability
- Maintenance free

## Application

- Marine and Autocamp light

Bridge rectifier circuit

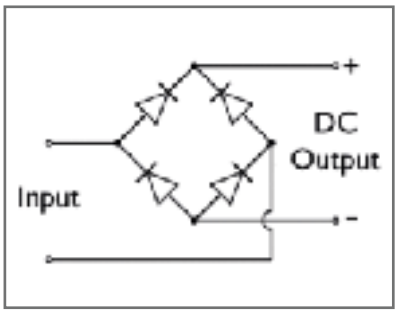


Cabel connector





April 2024