
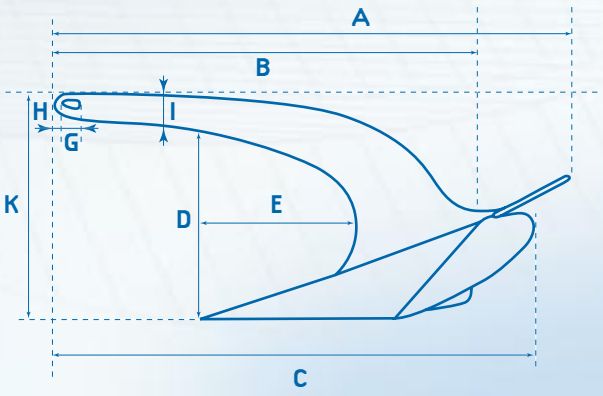


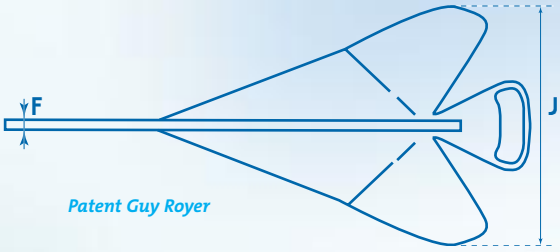

Patent Guy Royer

Weight kg	Dim. in mm A	B	C	D	E	F	G	H	I	J	K
12	755	640	440	235	205	10	25	13	48	300	310
14	807	675	470	260	230	10	25	15	50	330	340
16	855	720	520	280	255	10	30	15	52	340	360
20	895	750	560	300	272	10	30	18	58	390	400
24	958	826	600	315	290	12	35	20	65	415	420

FOB SAS

P.O. Box 14
29801 Brest Cedex 09
France

Phone : +33 2 98 02 04 17
Fax : +33 2 98 02 43 48

Design Hippocampe • 068005 • 11/02.

FOB ROCK

Ideal for the crowded moorings

Certified as High Holding Power anchor by the Bureau Véritas.

FOB ROCK

Ideal for the crowded moorings

Specifically designed for crowded moorings.

- Immediate gripping
- Terrific holding power even in the event of a tangential and an oblique pull
- Multi-purpose in all kinds of sea-bottom
- Easy handling

3 OPTIMUM ANGLE

- The stronger the pull the deeper the anchor digs into the ground.

4 LEADED LEST

- Ensures effective burying in all kinds of sea-bottom.

1 SHUTTERS

- Ensure anchor immobilisation.



Made of galvanized steel or stainless steel (polished mirror).

5 CROWN

- Increases the holding power.
- Facilitates anchor installation on board.

2 RUDDERS

- Guide the anchor into the best gripping position.